

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: EN 50121-1: 2017
EN 50121-3-2: 2016+A1:2019
EN 50155: 2021 (EMC Part only)
EN 61000-3-2: 2014, Class A
EN IEC 61000-3-2: 2019+A1:2021+A2:2024, Class A
EN 61000-3-3: 2013+A1:2019+A2:2021+AC:2022

Report No.: CEBDBO-WTW-P25060235

Product: Arm-based Edge AI Computing

Brand: Vecow

Model No.: EAC-4000

Series Model: EAC-4XXXXXXXXXXXXXXXXX ("X" can be 0-0, A-Z, - or blank for marketing purpose)

Received Date: 2025/6/10

Test Date: 2025/6/25 ~ 2025/7/18

Issued Date: 2025/8/5

Applicant: Vecow Co., Ltd.


Address: 3F., No.10, Jiankang Rd., Zhonghe Dist., New Taipei City 23586, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Approved by:


Jim Hsiang / Associate Technical Manager

Date:

2025/8/5

This test report consists of 62 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Jessica Cheng/ Senior Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/>, and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Performance Criteria	6
2.2 Measurement Uncertainty	7
2.3 Supplementary Information	7
3 General Information	8
3.1 Description of EUT	8
3.2 Primary Clock Frequencies of Internal Source.....	8
3.3 Features of EUT	8
3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode	9
3.5 Test Program Used and Operation Descriptions	10
3.6 Connection Diagram of EUT and Peripheral Devices	11
3.7 Configuration of Peripheral Devices and Cable Connections	13
4 Test Instruments	15
4.1 Conducted Emissions from Power Ports.....	15
4.2 Radiated Emissions up to 1 GHz	16
4.3 Radiated Emissions above 1 GHz.....	17
4.4 Harmonic Current Measurement.....	17
4.5 Voltage Fluctuations and Flicker Measurement	17
4.6 Electrostatic Discharges (ESD)	18
4.7 Radio Frequency Electromagnetic Field (RS).....	19
4.8 Fast Transients Common Mode (EFT).....	20
4.9 Surges	20
4.10 Radio Frequency Common Mode (CS).....	20
5 Limits of Test Items.....	22
5.1 Conducted Emissions from Power Ports.....	22
5.2 Radiated Emissions up to 1 GHz	22
5.3 Radiated Emissions above 1 GHz.....	22
5.4 Harmonic Current Measurement.....	23
5.5 Voltage Fluctuations and Flicker Measurement	24
5.6 General immunity requirements	24
6 Test Arrangements.....	25
6.1 Conducted Emissions from Power Ports.....	25
6.2 Radiated Emissions up to 1 GHz	26
6.3 Radiated Emissions above 1 GHz.....	27
6.4 Harmonic Current Measurement.....	28
6.5 Voltage Fluctuations and Flicker Measurement	28
6.6 Electrostatic Discharges (ESD)	29
6.7 Radio Frequency Electromagnetic Field (RS).....	31
6.8 Fast Transients Common Mode (EFT).....	32
6.9 Surges	33
6.10 Radio Frequency Common Mode (CS).....	34
7 Test Results of Test Item.....	35
7.1 Conducted Emissions from Power Ports.....	35
7.2 Radiated Emissions up to 1 GHz	37
7.3 Radiated Emissions above 1 GHz.....	39
7.4 Harmonic Current Measurement.....	41
7.5 Voltage Fluctuations and Flicker Measurement	42
7.6 Electrostatic Discharges (ESD)	43
7.7 Radio Frequency Electromagnetic Field (RS).....	49
7.8 Fast Transients Common Mode (EFT).....	50
7.9 Surges	51

7.10	Radio Frequency Common Mode (CS).....	52
8	Pictures of Test Arrangements	53
8.1	Conducted Emissions from Power Ports.....	53
8.2	Radiated Emissions up to 1 GHz	54
8.3	Radiated Emissions above 1 GHz.....	55
8.4	Harmonic Current Measurement.....	56
8.5	Voltage Fluctuations and Flicker Measurement	56
8.6	Electrostatic Discharges (ESD)	57
8.7	Radio Frequency Electromagnetic Field (RS).....	58
8.8	Fast Transients Common Mode (EFT)	59
8.9	Surges	60
8.10	Radio Frequency Common Mode (CS).....	61
9	Information of the Testing Laboratories	62

Release Control Record

Issue No.	Description	Date Issued
CEBDBO-WTW-P25060235	Original release.	2025/8/5

1 Certificate

Product: Arm-based Edge AI Computing

Brand: Vecow

Test Model: EAC-4000

Series Model: EAC-4XXXXXXXXXXXXX ("X" can be 0-0, A-Z, - or blank for marketing purpose)

Sample Status: Engineering sample

Applicant: Vecow Co., Ltd.

Test Date: 2025/6/25 ~ 2025/7/18

Standard: EN 50121-1: 2017

EN 50121-3-2: 2016+A1:2019

EN 50155: 2021 (EMC Part only)

EN 61000-3-2: 2014, Class A

EN IEC 61000-3-2: 2019+A1:2021+A2:2024, Class A

EN 61000-3-3: 2013+A1:2019+A2:2021+AC:2022

Measurement procedure: EN 61000-4-2: 2009 / IEC 61000-4-2: 2008 ED. 2.0

EN IEC 61000-4-3: 2020 / IEC 61000-4-3: 2020 ED. 4.0

EN 61000-4-4: 2012 / IEC 61000-4-4: 2012 ED. 3.0

EN 61000-4-5: 2014+A1:2017 / IEC 61000-4-5: 2017 ED. 3.1

EN IEC 61000-4-6: 2023 / IEC 61000-4-6: 2023 ED. 5.0

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

2 Summary of Test Results

The test items that the EUT need to perform in accordance with its interfaces, evaluated functions are as follows:

Standard	Test Item	Result	Remark
EN 50121-3-2, clause 7	Conducted Emissions from Power Ports	Pass	Minimum passing margin is -49.63 dB at 0.17651 MHz
EN 50121-3-2, clause 7	Radiated Emissions up to 1 GHz	Pass	Minimum passing margin is -6.00 dB at 148.50 MHz
EN 50121-3-2, clause 7	Radiated Emissions above 1 GHz	Pass	Minimum passing margin is -19.69 dB at 1199.72 MHz
EN 61000-3-2 EN IEC 61000-3-2	Harmonic Current Measurement	Pass	The power consumption of EUT is less than 75W and no limits are applied.
EN 61000-3-3	Voltage Fluctuations and Flicker Measurement	Pass	$P_{st} \leq 1.00$ $d_{max} \leq 4.00\%$ $P_{lt} \leq 0.65$ $d_c \leq 3.30\%$ $T_{max} \leq 500$ ms
IEC 61000-4-2	Electrostatic Discharges (ESD)	Pass	For EN 50121-3-2 Performance Criteria A
IEC 61000-4-3	Radio Frequency Electromagnetic Field (RS)	Pass	For EN 50121-3-2 Performance Criteria A
IEC 61000-4-4	Fast Transients Common Mode (EFT)	Pass	For EN 50121-3-2 Performance Criteria A
IEC 61000-4-5	Surges	Pass	For EN 50121-3-2 Performance Criteria A
IEC 61000-4-6	Radio Frequency Common Mode (CS)	Pass	For EN 50121-3-2 Performance Criteria A

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Performance Criteria

General Performance Criteria

The general performance criteria apply for those ports for which no specific performance criteria are defined (e.g. auxiliary ports) in the report.

Performance criterion A: The apparatus shall continue to operate as intended during and after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Performance criterion B: The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer, when the apparatus is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is however allowed. No change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

Performance criterion C: Temporary loss of function is allowed, provided the function is selfrecoverable or can be restored by the operation of the controls.

2.2 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Specification	Expanded Uncertainty (k=2) (±)	Maximum allowable uncertainty (±)
Conducted Emissions from Power Ports	9 kHz ~ 30 MHz	2.90 dB	3.4 dB (U_{CISPR})
Radiated Emissions up to 1 GHz	30 MHz ~ 1 GHz	3m : 5.54 dB 10m : 4.16 dB	6.3 dB (U_{CISPR})
Radiated Emissions above 1 GHz	1 GHz ~ 6 GHz	4.64 dB	5.2 dB (U_{CISPR})

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.3 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 Description of EUT

Product	Arm-based Edge AI Computing
Brand	Vecow
Test Model	EAC-4000
Series Model	EAC-4XXXXXXXXXXXXXXXXX ("X" can be 0-0, A-Z, - or blank for marketing purpose)
Sample Status	Engineering sample
Power Supply Rating	Refer to note as below

Note:

1. The EUT uses following accessories.

Item	Brand	Model	Specification
AC Adapter	FSP	FSP060-DHAN3	AC Input : AC 100-240V, 50-60Hz, 1.8A (3Pin) DC Output : DC 12V, 5.0A, 60.0W (1.15m, with a core)

3.2 Primary Clock Frequencies of Internal Source

The highest frequency generated or used within the EUT or on which the EUT operates or tunes is 1.42 GHz, provided by Vecow Co., Ltd., for detailed internal source, please refer to the manufacturer's specifications.

3.3 Features of EUT

The tests reported herein were performed according to the method specified by Vecow Co., Ltd., for detailed feature description, please refer to the manufacturer's specifications or user's manual.

Please refer to appendix of the report if the applicant has provided additional descriptions of the EUT.

The EUT configured with the following key components:

Component	Specification
CPU	NVIDIA Jetson Orin™ NX/Nano, up to 100 TOPS AI performance (Orin Nano Super Mode Supported)
RAM	Up to 16GB LPDDR5
SSD	128GB NVMe

3.4 Operating Modes of EUT and Determination of Worst Case Operating Mode

The EUT has been pre-tested under following test modes.

Test Condition	
Mode	Radiated Emissions up to 1 GHz
1	Full system,HDMI 3840*2160,60Hz,Lan 1G link + upright
2	Full system,HDMI 3840*2160,60Hz,Lan 1G link + lie flat
Note: The worst case is mode 2 shown in bold.	

Test modes are presented in the report as below.

Test Condition	
Mode	Conducted Emissions from Power Ports
A	Full system,HDMI 3840*2160,60Hz,Lan 1G link + lie flat + Input Power(230 Vac, 50 Hz)
Mode	Radiated Emissions up to 1 GHz
A	Full system,HDMI 3840*2160,60Hz,Lan 1G link + lie flat + Input Power(230 Vac, 50 Hz)
Mode	Radiated Emissions above 1 GHz
A	Full system,HDMI 3840*2160,60Hz,Lan 1G link + lie flat + Input Power(230 Vac, 50 Hz)
Mode	Harmonic Current Measurement
A	Full system,HDMI 3840*2160,60Hz,Lan 1G link + lie flat + Input Power(230 Vac, 50 Hz)
Mode	Voltage Fluctuations and Flicker Measurement
A	Full system,HDMI 3840*2160,60Hz,Lan 1G link + lie flat + Input Power(230 Vac, 50 Hz)
Mode	Electrostatic Discharges (ESD)
A	Full system,HDMI 3840*2160,60Hz,Lan 1G link + lie flat + Input Power(230 Vac, 50 Hz)
Mode	Radio Frequency Electromagnetic Field (RS)
A	Full system,HDMI 3840*2160,60Hz,Lan 1G link + lie flat + Input Power(230 Vac, 50 Hz)
Mode	Fast Transients Common Mode (EFT)
A	Full system,HDMI 3840*2160,60Hz,Lan 1G link + lie flat + Input Power(230 Vac, 50 Hz)
Mode	Surges
A	Full system,HDMI 3840*2160,60Hz,Lan 1G link + lie flat + Input Power(230 Vac, 50 Hz)
Mode	Radio Frequency Common Mode (CS)
A	Full system,HDMI 3840*2160,60Hz,Lan 1G link + lie flat + Input Power(230 Vac, 50 Hz)

3.5 Test Program Used and Operation Descriptions

For Emission test


- a. Turned on the power of all equipment.
- b. EUT ran a test program (BurnIntest) to enable all functions.
- c. EUT read and wrote messages to/ from internal and external storage devices.
- d. EUT sent (H) message to monitor, and then displayed message on its screen.
- e. Laptop sent and received messages to/ from EUT via Lan cable.
- f. EUT sent messages to printer and printer printed them out.

For Harmonics, Flicker & Immunity test


- a. Turned on the power of all equipment.
- b. EUT ran a test program (BurnIntest) to enable all functions.
- c. EUT read and wrote messages to/ from internal and external storage devices.
- d. EUT sent (ITU-R BT 471-1) message to monitor, and then displayed message on its screen.
- e. Laptop sent and received messages to/ from EUT via Lan cable.

3.6 Connection Diagram of EUT and Peripheral Devices


For Emission test

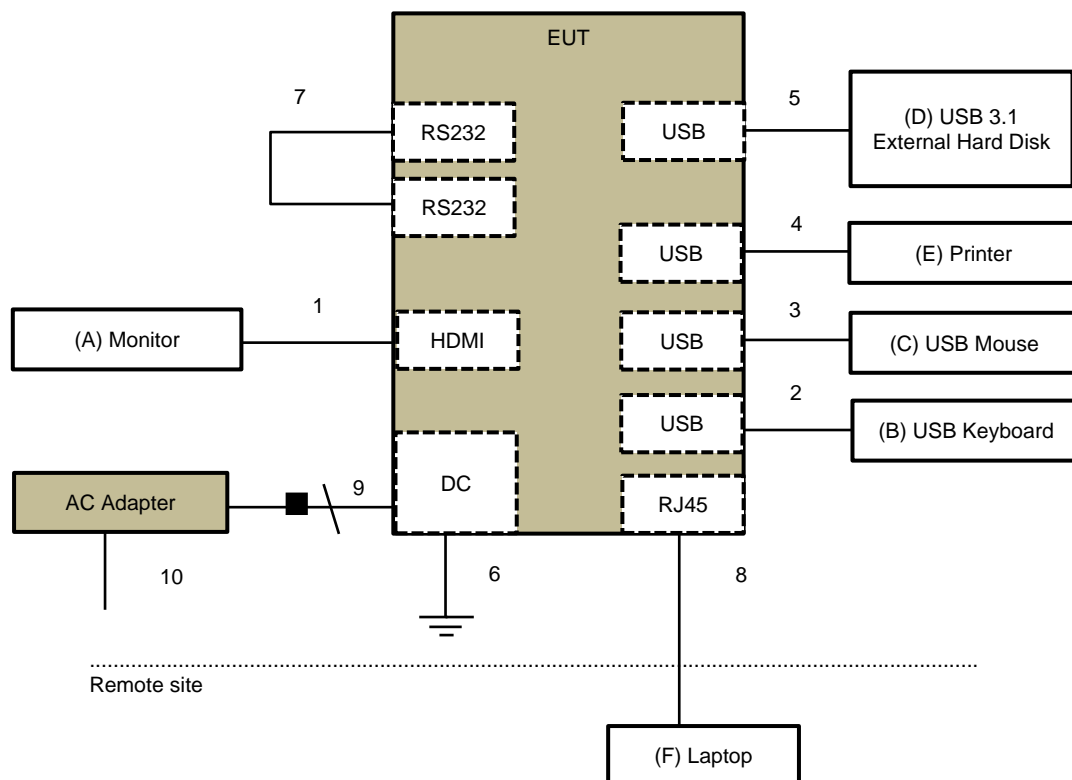

For Emission tests (Harmonics & Flicker) & Immunity tests (RS & CS excluded):

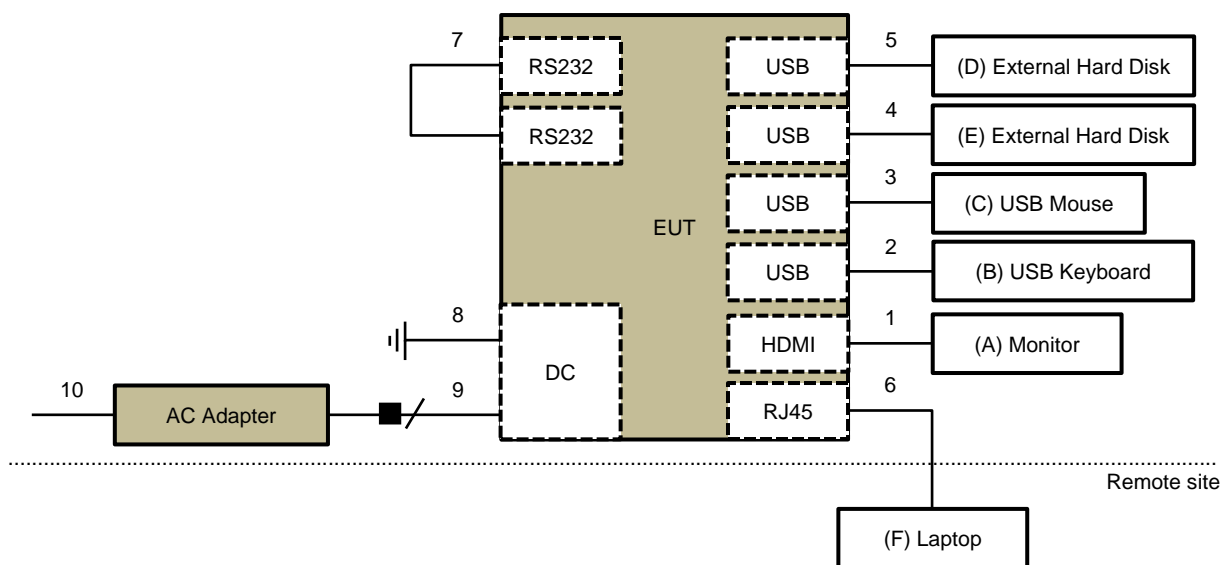

For Immunity tests (RS & CS):

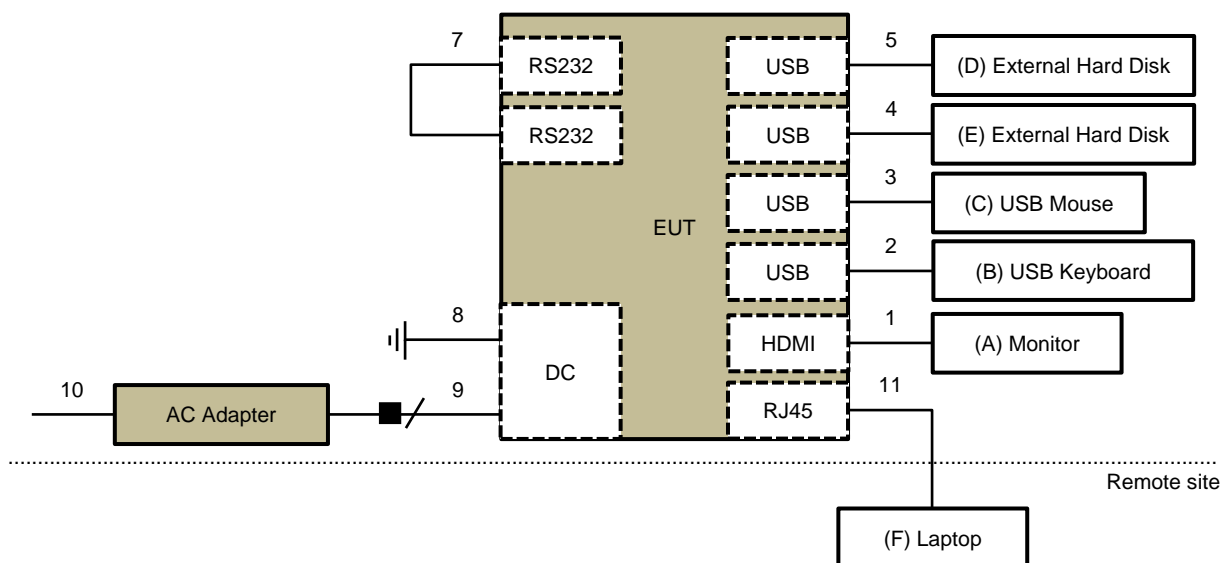

3.7 Configuration of Peripheral Devices and Cable Connections

For Emission test

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Monitor	ASUS	PA279CV	M7LMTF235958	DoC	Provided by Lab
B	USB Keyboard	Dell	KB216t	CN-0W33XP- LO300-7CL-191E	N/A	Provided by Lab
C	USB Mouse	DELL	MOCZUL	CN-049TWY- PRC00-77B-008E	N/A	Provided by Lab
D	USB 3.1 External Hard Disk	Transcend	SSD220S	SK21D1636D00W5	DoC	Provided by Lab
E	Printer	HP	HP Officejet Pro 251dW	N/A	B94SDGOB1191	Provided by Lab
F	Laptop	LENOVO	T480	PF1EZSA2	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	HDMI	1	2	Y	0	Provided by Lab
2	USB	1	1.8	Y	0	Provided by Lab
3	USB	1	1.8	Y	0	Provided by Lab
4	USB	1	1.8	Y	0	Provided by Lab
5	USB	1	1	Y	0	Provided by Lab
6	GND (PE)	1	1.5	N	0	Provided by Lab
7	RS232	1	0.1	N	0	Supplied by applicant
8	Cat. 5e	1	10	N	0	Provided by Lab
9	Power	1	0.2	N	0	Supplied by applicant
10	Power	1	1.8	N	0	Provided by Lab

For Harmonics, Flicker & Immunity test

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Monitor	Vita	VT-270JTG2	204270JTFE002	DoC	Provided by Lab
B	USB Keyboard	Dell	KU-1060	N/A	N/A	Provided by Lab
C	USB Mouse	DELL	MSU1175	N/A	N/A	Provided by Lab
D	External Hard Disk	WD	MY PASSPORT SSD	180887420071	N/A	Provided by Lab
E	External Hard Disk	WD	MY PASSPORT SSD	180887421083	N/A	Provided by Lab
F	Laptop	LENOVO	T480	PF1EZSA2	N/A	Provided by Lab

ID	Cable Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1	HDMI	1	1.8	Y	0	Provided by Lab
2	USB	1	1.8	Y	0	Provided by Lab
3	USB	1	1.8	Y	0	Provided by Lab
4	USB	1	1	Y	0	Provided by Lab
5	USB	1	1	Y	0	Provided by Lab
6	Cat. 5e	1	10	N	0	Provided by Lab
7	RS232	1	0.1	N	0	Supplied by applicant
8	GND (PE)	1	2	N	0	Provided by Lab
9	Power	1	0.1	N	0	Supplied by applicant
10	Power	1	1.8	N	0	Provided by Lab
11	Cat. 5e	1	10	Y	0	Provided by Lab

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Conducted Emissions from Power Ports

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
50 ohm terminal resistance LYNICS	0900510	E1-01-305	2025/2/20	2026/2/19
		E1-011484	2024/8/12	2025/8/11
Diode Pulse Limiter Schwarzbeck	VTSD 9561 F-N	01622	2025/5/2	2026/5/1
EMI Test Receiver R&S	EPL 1000	101064	2025/4/17	2026/4/16
Fixed Attenuator STI	STI02-2200-10	NO.1	2024/9/12	2025/9/11
Highpass filter EMCI	150HPF-ME	114005	2025/5/2	2026/5/1
		114006	2025/5/2	2026/5/1
	150HPF-MF	113009	2025/5/2	2026/5/1
LISN R&S	ENV216	100024	2024/9/6	2025/9/5
		101196	2025/5/19	2026/5/18
		101197	2024/7/11	2025/7/10
LISN Schwarzbeck	NNLK 8121	8121-00759	2024/8/20	2025/8/19
		8121-808	2025/4/23	2026/4/22
	NNLK 8129	00624	2024/10/9	2025/10/8
		8129229	2024/10/14	2025/10/13
RF Coaxial Cable PEWC	5D-FB	Cable-CO10-01	2025/2/5	2026/2/4
Software BVADT	Cond_V7.4.1.0	N/A	N/A	N/A

Notes:

1. The test was performed in Linkou Conduction 10.
2. The VCCI Site Registration No. C-11852.
3. Tested Date: 2025/7/3

4.2 Radiated Emissions up to 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
ADT. Tower	AT100	0205	N/A	N/A
ADT. Turn Table	TT100	0205	N/A	N/A
Bi_Log Antenna schaffner	CBL 6111D	22270	2024/10/8	2025/10/7
Coupling / Decoupling Network Schwarzbeck	CDNE-M2	00097	2025/5/28	2026/5/27
	CDNE-M3	00091	2025/3/20	2026/3/19
EMI Test Receiver R&S	ESCS 30	100292	2024/9/18	2025/9/17
Fixed Attenuator Mini-Circuits	UNAT-5+	PAD-ST2-01	2024/10/19	2025/10/18
Preamplifier HP	8447D	2727A05786	2025/2/14	2026/2/13
RF Coaxial Cable Pacific	8D-FB	Cable-ST2-01	2024/11/6	2025/11/5
Software BVADT	Radiated_V8.8.09	N/A	N/A	N/A

Notes:

1. The test was performed in Linkou Open Site2 , The test site validated date: 2024/7/13 (NSA)
2. The VCCI Site Registration No. R-10237.
3. Tested Date: 2025/7/4

4.3 Radiated Emissions above 1 GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Fix tool for Boresight antenna tower BV	BAF-01	9	N/A	N/A
Fixed Attenuator Mini-Circuits	BW-K3-2W44+	PAD-CH7-03	2024/7/5	2025/7/4
	BW-N4W5+	PAD-CH10-02	2024/7/5	2025/7/4
Horn Antenna EMCO	3115	6714	2024/11/10	2025/11/9
Horn Antenna ETS-Lindgren	3117-PA	00215857	2024/11/10	2025/11/9
Horn Antenna Schwarzbeck	BBHA 9170	BBHA9170190	2024/11/10	2025/11/9
MXA Signal Analyzer Keysight	N9020B	MY60110438	2024/12/5	2025/12/4
		MY60112260	2025/5/26	2026/5/25
Notch Filter Micro-Tronics	BRC50703-01	010	2025/5/22	2026/5/21
	BRM17690	005	2025/5/22	2026/5/21
Preamplifier EMCI	EMC0126545	980076	2025/2/14	2026/2/13
	EMC184045B	980235	2025/2/14	2026/2/13
Preamplifier HP	8449B	3008A01292	2025/2/14	2026/2/13
RF Coaxial Cable EMEC	EM102-KMKM-100	02	2024/7/5	2025/7/4
	EM102-KMKM-350	01	2024/7/5	2025/7/4
Software BVADT	Radiated_V8.8.09	N/A	N/A	N/A
Turn Table & Tower Max Full	MF7802	MF780208216	N/A	N/A

Notes:

1. The test was performed in Linkou 966 Chamber 3 (CH 10).
2. The VCCI Site Registration No. G-10427.
3. Tested Date: 2025/7/3

4.4 Harmonic Current Measurement

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Harmonics and Flicker TESEQ	NSG 1007-45 / CCN 1000-3 / INA 2196 / INA 2197 / NSG 2200-3	1323A03998	2024/10/7	2025/10/6
Software	CTSMXL 2 V2.28	N/A	N/A	N/A

Notes:

1. The test was performed in Linkou EMS Room No.02.
2. Tested Date: 2025/7/10

4.5 Voltage Fluctuations and Flicker Measurement

Refer to section 4.4 to get the tested date and information of the instruments.

4.6 Electrostatic Discharges (ESD)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Electrostatic Analog Tester TESEQ	NSG 438	1875	2024/11/11	2025/11/10
ESD Generator EM TEST	Dito//DM-150/330//DM- 150/330-rfci	P1315117252/P1317117852	2025/7/7	2026/7/6
ESD Simulator EM TEST	Dito	V1203111608	2024/7/22	2025/7/21
ESD Simulator TESEQ	NSG 438	1364	2024/11/11	2025/11/10

Notes:

1. The test was performed in Linkou ESD Room No.02.
2. Tested Date: 2025/7/10

4.7 Radio Frequency Electromagnetic Field (RS)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Audio analyzer R&S	UPV	104934	2024/8/6	2025/8/5
Band Pass Filter B&K	WH3278	N/A	2024/11/20	2025/11/19
CHANCE MOST Full Anechoic Chamber (9x5x3m)	Chance Most	RS-002	2025/1/20	2026/1/19
Controller Amplifier Research	SC1000M3	305910	N/A	N/A
High Gain Horn Antenna Amplifier Research	AT4010	0329800	N/A	N/A
Isotropic EM Field Probe+EM Field Meter Wavecontrol	WPF18+SMP2	21WP090492+21SN1691	2025/1/21	2026/1/20
Log Periodic Antenna Amplifier Research	AT6080	0329465	N/A	N/A
Power Amplifier Amplifier Research	35S4G8AM4	0326094	N/A	N/A
Power Amplifier BONN	BSA 0125-800	1912556	N/A	N/A
Power sensor Boonton	51011-EMC	34152	2025/5/15	2026/5/14
		34153	2025/5/15	2026/5/14
Pressure-field Microphone B&K	4192	3190854	2024/12/12	2025/12/11
		3190855	2024/12/12	2025/12/11
RF Power Amplifier BONN	BLMA 1060-150	2214325C-02	N/A	N/A
	BLWA 0810-250	2214325A-01	N/A	N/A
RF Power Meter Boonton	4232A	10180	2025/5/15	2026/5/14
Signal Generator R&S	SMB100A	109279	2025/1/16	2026/1/15
Software BVADT	ABMS_Audio V7.4.10	N/A	N/A	N/A
	RS_V7.6.15	N/A	N/A	N/A
Stacked Log Periodic Antenna Schwarzbeck	STLP 9149	9149-260	N/A	N/A
Two channel microphone conditioning amplifier B&K	2690-OS2	3001996	2024/11/20	2025/11/19
Wireless Connectivity Tester R&S	CMW270	101075	2025/7/14	2026/7/13

Notes:

1. The test was performed in Linkou RS Room No.02.
2. Tested Date: 2025/7/14

4.8 Fast Transients Common Mode (EFT)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Burst generator Haefely	PEFT 4010	154954	2025/3/14	2026/3/13
Capacitive Coupling clamp Haefely	IP4A	155173	2025/3/14	2026/3/13

Notes:

1. The test was performed in Linkou EFT Room .
2. Tested Date: 2025/6/25

4.9 Surges

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
CDN for Unshielded Unsymmetrical Signal & Data Lines TESEQ	CDN117	40144	2024/8/26	2025/8/25
Coupling / Decoupling Network TESEQ	CDN 118-T8	40386	2024/8/26	2025/8/25
	CDN HSS-2	41009	2025/4/14	2026/4/13
Surge & EFT Generators TESEQ	NSG 3060 / CDN 3061	1572 / 1463	2025/4/14	2026/4/13
Surge CDN TESEQ	CDN 3083-S100	1215	2025/4/14	2026/4/13

Notes:

1. The test was performed in Linkou EMS Room No.02.
2. Tested Date: 2025/7/2

4.10 Radio Frequency Common Mode (CS)

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Audio analyzer R&S	UPV	104934	2024/8/6	2025/8/5
Band Pass Filter B&K	WH3278	N/A	2025/6/9	2026/6/8
CDN Calibration Kit TESEQ	CDN T8S	29459	2025/2/18	2026/2/17
Coupling / Decoupling Network EM TEST	CDN M1/32A	306508	2025/2/18	2026/2/17
	CDN T2	306509	2025/2/18	2026/2/17
Coupling / Decoupling Network FCC	FCC-801-M2-16A	01047	2025/2/18	2026/2/17
	FCC-801-M5-50A	100018	2025/1/15	2026/1/14
Coupling / Decoupling Network TESEQ	CDN M3-100-750V	69836	2024/10/11	2025/10/10
	CDN M5-100-750V	69834	2024/10/11	2025/10/10
	CDN M232	37702	2025/2/18	2026/2/17
	CDN M332	41256	2025/2/18	2026/2/17
		41258	2025/2/18	2026/2/17
	CDN M432S	56519	2025/2/18	2026/2/17
	CDN S751A	56435	2025/2/18	2026/2/17
		56436	2025/2/18	2026/2/17

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
	CDN ST08A	56525	2025/2/18	2026/2/17
		56527	2025/2/18	2026/2/17
	CDN T8-10	40376	2025/2/18	2026/2/17
	CDN T8-230	56641	2024/9/27	2025/9/26
		56642	2024/9/27	2025/9/26
	CDN T400A	49918	2025/2/18	2026/2/17
	CDN T800	34428	2025/2/18	2026/2/17
Current Clamp FCC	F-120-9A	361	2024/8/19	2025/8/18
FCC EM Injection Clamp FCC	F-203I-23mm	455	N/A	N/A
Fixed Attenuator SGH	VFA_Z-06H20-N2-06	01	N/A	N/A
Power Amplifier BONN	BSA 0125-125	2314648	N/A	N/A
Power Sensor R&S	NRV-Z5	837878/039	2024/10/12	2025/10/11
Pressure-field Microphone B&K	4192	3190854	2024/12/12	2025/12/11
		3190855	2024/12/12	2025/12/11
RF Power Meter R&S	NRVD	837794/040	2024/10/12	2025/10/11
Signal Generator R&S	SMB100A	105489	2024/8/27	2025/8/26
Software BVADT	ABMS_Audio V7.4.10	N/A	N/A	N/A
	BVADT_CS_V7.6.6	N/A	N/A	N/A
Two channel microphone conditioning amplifier B&K	2690-OS2	2645274	2025/6/9	2026/6/8
Wideband Radio Communication Tester R&S	CMW500	170333	2024/12/23	2025/12/22

Notes:

1. The test was performed in Linkou CS Room No.1.
2. Tested Date: 2025/7/18

5 Limits of Test Items

5.1 Conducted Emissions from Power Ports

Frequency (MHz)	AC or DC power ports
	Quasi-peak, (dBuV)
0.15 - 0.5	99
0.5 - 30	93

Notes: The lower limit shall apply at the transition frequencies.

5.2 Radiated Emissions up to 1 GHz

Frequency (MHz)	Quasi-peak (dBuV/m)	
	at 3m	at 10m
30 - 230	50	40
230 - 1000	57	47

- Notes: 1. The lower limit shall apply at the transition frequencies.
 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
 3. All emanations from a digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.3 Radiated Emissions above 1 GHz

Frequency (GHz)	dBuV/m (at 3m)	
	Average	Peak
1 - 3	56	76
3 - 6	60	80

- Notes: 1. The lower limit shall apply at the transition frequencies.
 2. Emission level (dBuV/m) = 20 log Emission level (uV/m).

Frequency Range of Radiated Measurement (For unintentional radiators)

Highest internal frequency (F_x) (MHz)	Highest measurement frequency (F_m) (GHz)
$F_x \leq 108 \text{ MHz}$	1
$108 \text{ MHz} < F_x \leq 500 \text{ MHz}$	2
$500 \text{ MHz} < F_x \leq 1 \text{ GHz}$	5
$F_x > 1 \text{ GHz}$	$5 \times F_x$ up to a maximum of 6 GHz

F_x is the highest fundamental frequency generated and/or used in the ITE or digital apparatus under test.

5.4 Harmonic Current Measurement

Limits for Class A equipment		Limits for Class D equipment		
Harmonic Order n	Max. permissible harmonics current A	Harmonic Order n	Max. permissible harmonics current per watt mA/W	Max. permissible harmonics current A
Odd harmonics		Odd Harmonics only		
3	2.30	3	3.4	2.30
5	1.14	5	1.9	1.14
7	0.77	7	1.0	0.77
9	0.40	9	0.5	0.40
11	0.33	11	0.35	0.33
13	0.21	13	0.30	0.21
$15 \leq n \leq 39$	$0.15 \times 15/n$	$15 \leq n \leq 39$	$3.85/n$	$0.15 \times 15/n$
Even harmonics				
2	1.08			
4	0.43			
6	0.30			
$8 \leq n \leq 40$	$0.23 \times 8/n$			

Notes: 1. Class A and Class D are classified according to section 5 of EN 61000-3-2.

2. According to section 7 of EN 61000-3-2, the above limits for all equipment except for lighting equipment having an active input power > 75 W and no limits apply for equipment with an active input power up to and including 75 W.

Classification of equipment

Class A	Class B	Class C	Class D
Balanced three-phase equipment; Household appliances excluding equipment as Class D; Tools excluding portable tools; Dimmers for incandescent lamps; Audio equipment; Equipment not specified in one of the three other classes.	Portable tools; Arc welding equipment which is not professional equipment.	Lighting equipment.	Equipment having a specified power less than or equal to 600 W of the following types: Personal computers and personal computer monitors; Television receivers; Refrigerators and freezers having one or more variable-speed drives to control compressor motor(s).

5.5 Voltage Fluctuations and Flicker Measurement

Test Item	Limit	Note
P_{st}	1.0	P_{st} means short-term flicker indicator.
P_{lt}	0.65	P_{lt} means long-term flicker indicator.
T_{dt} (ms)	500	T_{dt} means maximum time that $d(t)$ exceeds 3.3 %.
d_c (%)	3.3%	d_c means relative steady-state voltage change
d_{max} (%)		d_{max} means maximum relative voltage change. Control Method of Equipment (see below)
	4%	■ - without additional conditions
	6%	□ - switched manually, or - switched automatically more frequently than twice per day, and also has either a delayed restart (the delay not less than a few tens of seconds), or manual restart, after a power supply interruption
	7%	□ - attended whilst in use (for example: hair dryers, vacuum cleaners, kitchen equipment such as mixers, garden equipment such as lawn mowers, portable tools such as electric drills), or switched on automatically, or - is intended to be switched on manually, no more than twice per day, and also has either a delayed restart (the delay being not less than a few tens of seconds) or manual restart, after a power supply interruption.

5.6 General immunity requirements

Port	Basic Standard	Test item	Test specification	Performance criteria
Power input	IEC 61000-4-4	Fast Transients, Common Mode (EFT)	± 2 kV 5/50 ns 5 kHz, repetition frequency	A
	IEC 61000-4-5	Surge	Line to line: ± 1 kV, 42 Ω , 0,5 μ F, 1.2/50 μ s Line to earth: ± 2 kV, 42 Ω , 0,5 μ F, 1.2/50 μ s	B
	IEC 61000-4-6	Radio Frequency, Common Mode (CS)	0.15~80(MHz), 10 V, 80% AM (1 kHz)	A
Signal and communication, process measurement and control ports	IEC 61000-4-4	Fast Transients, Common Mode (EFT)	± 2 kV 5/50 ns 5 kHz, repetition frequency	A
	IEC 61000-4-6	Radio Frequency, Common Mode (CS)	0.15~80 MHz, 10 V, 80% AM (1 kHz),	A
Enclosure	IEC 61000-4-2	Electrostatic Discharge (ESD)	± 6 kV (contact) ± 8 kV (Air)	B
	IEC 61000-4-3	Radio Frequency Electromagnetic Field (RS)	80~800 MHz, 20V/m*, 80% AM (1kHz) 800~1000 MHz, 20V/m, 80% AM (1kHz) 1400~2000 MHz, 10V/m, 80% AM (1kHz) 2000~2700 MHz, 5V/m, 80% AM (1kHz) 5100~6000 MHz, 3V/m, 80% AM (1kHz)	A


*: This limit applies to equipment mounted in the passenger compartments, drivers cab or external to the rolling stock (roof, underframe). For equipment mounted in all other areas a severity level of 10 V/m may be used.

6 Test Arrangements

6.1 Conducted Emissions from Power Ports

- a. The EUT is placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN), or an Artificial Network (AN) as specified in CISPR 25 if used in a vehicle. Other support units are connected to the power mains through another LISN and/or AN. They provide coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The test results of conducted emissions at mains ports are recorded of six worst margins for quasi-peak (mandatory) [and average (if necessary)] values against the limits at frequencies of interest unless the margin is 20 dB or greater.

Note: The resolution bandwidth and video bandwidth of test receiver is 9kHz for quasi-peak detection (QP) and average detection (AV) at frequency 0.15MHz-30MHz.

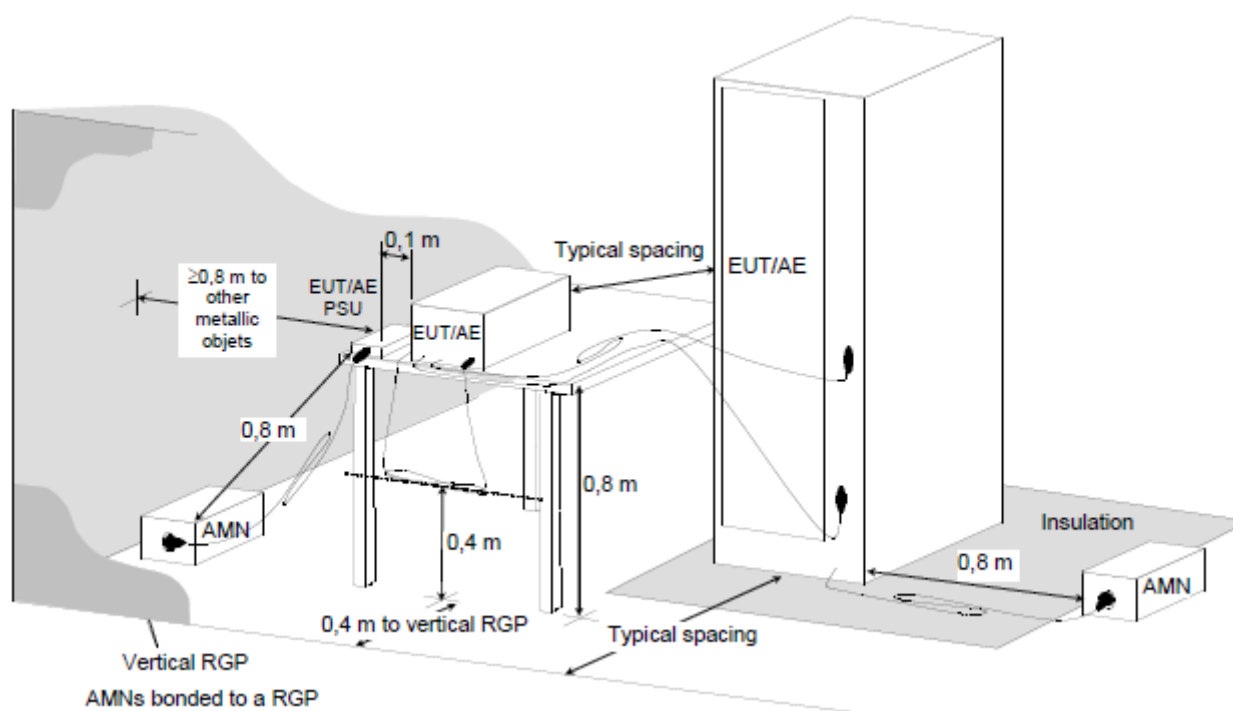


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

6.2 Radiated Emissions up to 1 GHz

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the floor standing EUT shall be insulated (by insulation of maximum thickness of 150 mm) from the horizontal reference ground plane. The rotating table is rotated 360 degrees to determine the position of the highest radiation. If the equipment requires a dedicated ground connection, this shall be provided and bonded to the RGP.
- The EUT is set 10 meters away from the interference-receiving antenna, which is mounted on the top of a variable-height antenna tower.
- The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is up to 1 GHz.

Note: The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for quasi-peak detection (QP) at frequency up to 1GHz.

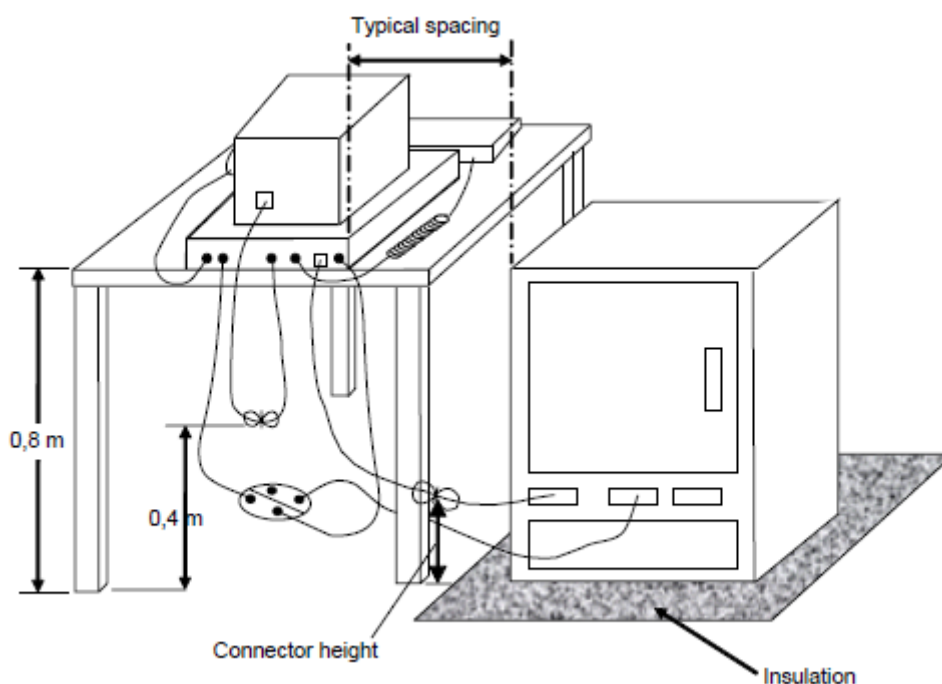


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

6.3 Radiated Emissions above 1 GHz

- For the table-top EUT is placed on a 0.8 meter to the top of rotating table; for the floor standing EUT shall be insulated (by insulation of maximum thickness of 150 mm) from the horizontal reference ground plane. The rotating table is rotated 360 degrees to determine the position of the highest radiation. If the equipment requires a dedicated ground connection, this shall be provided and bonded to the RGP.
- The EUT was set $d = 3$ meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- The height of antenna can be varied from one meter to four meters, the height of adjustment depends on the EUT height and the antenna 3 dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- The spectrum analyzer system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.


Note: The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1 GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1 GHz.

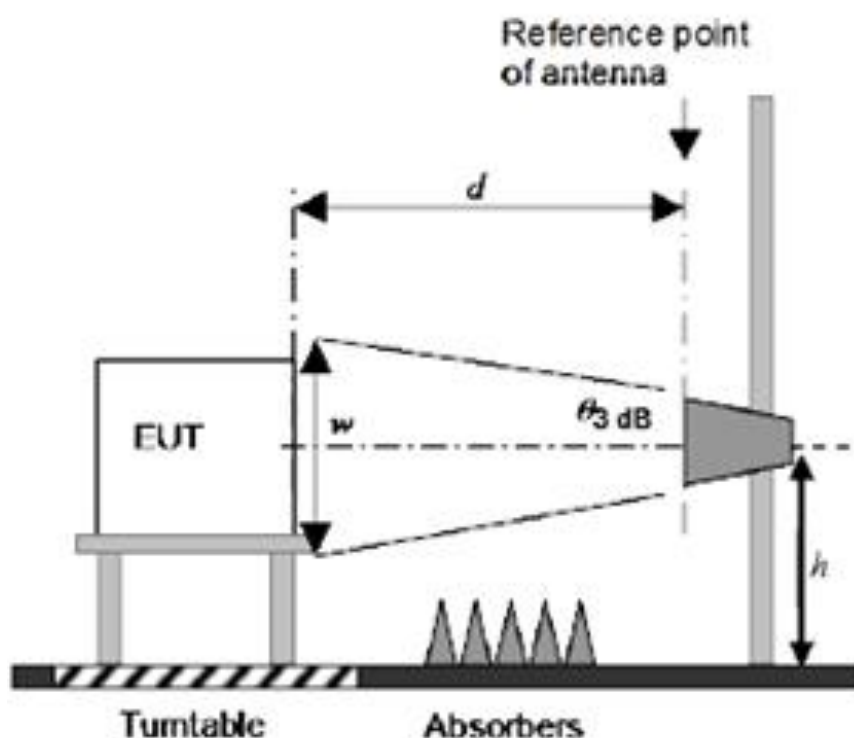

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

6.4 Harmonic Current Measurement


- The harmonic current limits apply to line currents and not to currents in the neutral conductor. Nevertheless, for single-phase equipment, it is permissible to measure the currents in the neutral conductor instead of the currents in the line.
- The EUT is tested as presented by, and in accordance with information provided by, the manufacturer. Preliminary operation of motor drives by the manufacturer may be needed before the tests are undertaken to ensure that results correspond with normal use.
- In all configurations, the use of additional load shall not cause the total output power available to be exceeded.
- The correspondent test program of test instrument to measure the current harmonics emanated from EUT is chosen. The measure time shall be not less than the time necessary for the EUT to be exercised.

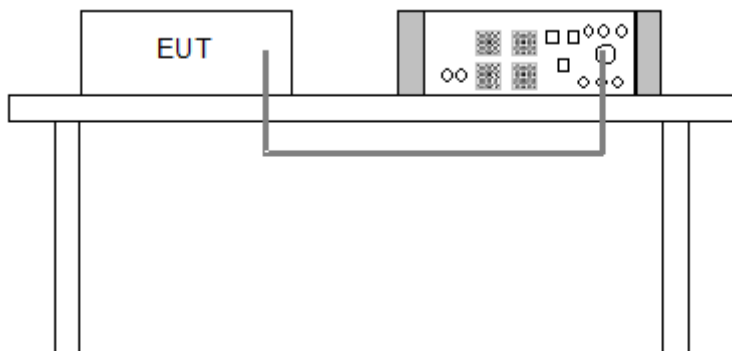

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

6.5 Voltage Fluctuations and Flicker Measurement

- Controls or automatic programs of the EUT shall be set to produce the most unfavourable sequence of voltage changes, using only those combinations of controls and programmes which are mentioned by the manufacturer in the instruction manual, or are otherwise likely to be used.
- Preliminary operation of motor drives may be needed before the tests to ensure that results corresponding to those of normal use are obtained.
- During the flick measurement, the measure time shall include that part of whole operation cycle in which the EUT produce the most unfavorable sequence of voltage changes. The observation period for short-term flicker indicator is 10 minutes and the observation period for long-term flicker indicator is 2 hours.

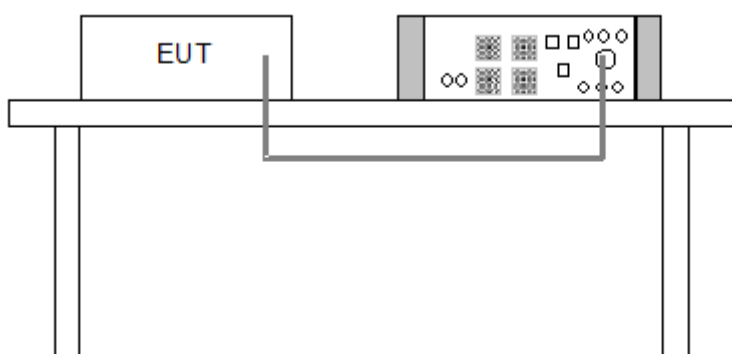


For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

6.6 Electrostatic Discharges (ESD)

Discharge Impedance:	330 ohm / 150 pF
Number of Discharge:	Air – Direct: 10 discharges per location (each polarity) Contact – Direct & Indirect: 10 discharges per location (each polarity)
Discharge Period:	1-second minimum

The basic test procedure was in accordance with EN/IEC 61000-4-2:

- Electrostatic discharges were applied only to those points and surfaces of the EUT that are accessible to users during normal operation.
- The test was performed with at least ten single discharges on the pre-selected points in the most sensitive polarity.
- The time interval between two successive single discharges was at least 1 second.
- The ESD generator was held perpendicularly to the surface to which the discharge was applied and the return cable was at least 0.2 meters from the EUT.
- Contact discharges were applied to the non-insulating coating, with the pointed tip of the generator penetrating the coating and contacting the conducting substrate.
- Air discharges were applied with the round discharge tip of the discharge electrode approaching the EUT as fast as possible (without causing mechanical damage) to touch the EUT. After each discharge, the ESD generator was removed from the EUT and re-triggered for a new single discharge. The test was repeated until all discharges were complete.
- At least ten single discharges (in the most sensitive polarity) were applied to the **Horizontal Coupling Plane** at points on each side of the EUT. The ESD generator was positioned at a distance of 0.1 meters from the EUT with the discharge electrode touching the **HCP**.
- At least ten single discharges (in the most sensitive polarity) were applied to the center of one vertical edge of the **Vertical Coupling Plane** in sufficiently different positions that the four faces of the EUT were completely illuminated. The **VCP** (dimensions 0.5m x 0.5m) was placed vertically to and 0.1 meters from the EUT.

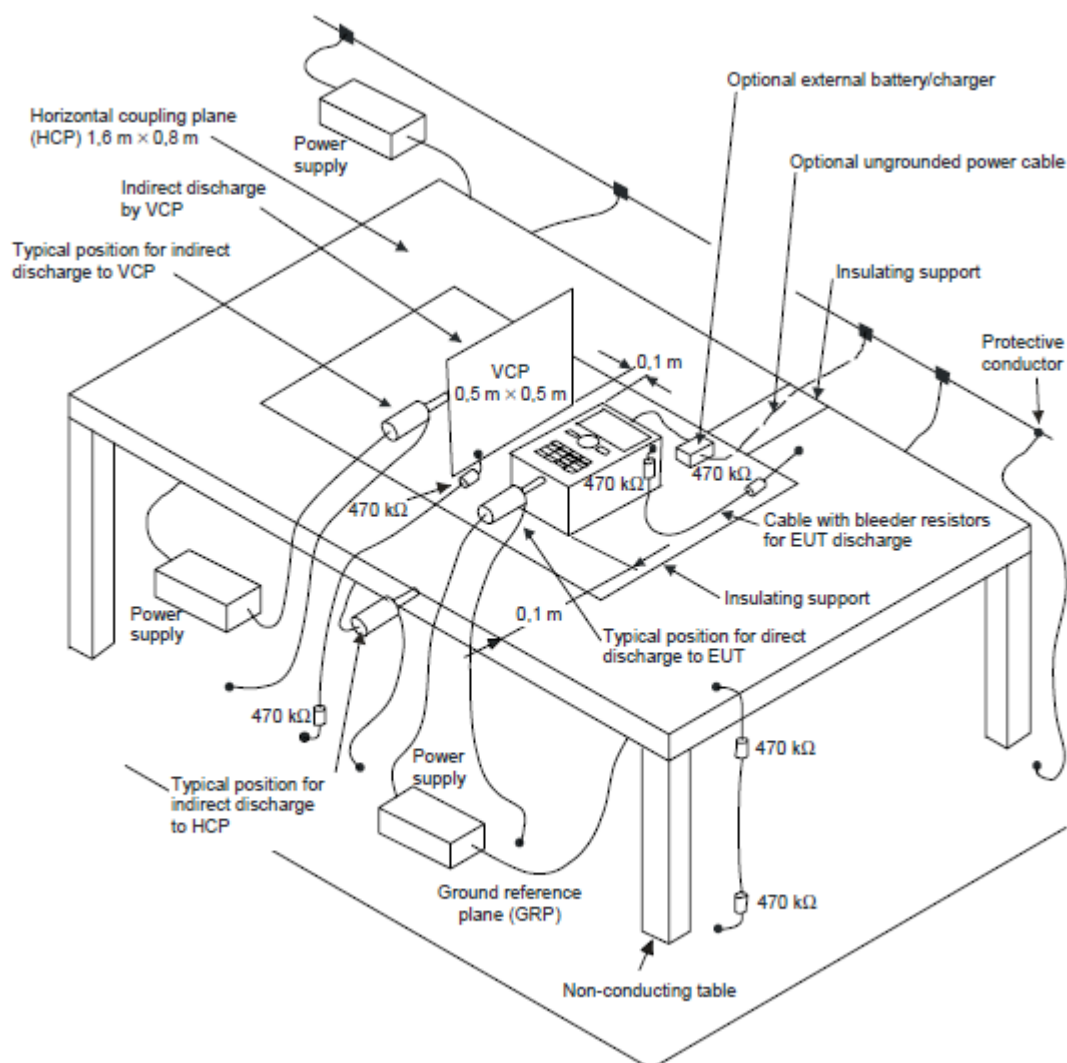

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the **Ground Reference Plane**. The **GRP** consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A **Horizontal Coupling Plane** (1.6m x 0.8m) was placed on the table and attached to the **GRP** by means of a cable with 940kΩ total impedance. The equipment under test, was installed in a representative system as described in section 7 of EN/IEC 61000-4-2, and its cables were placed on the **HCP** and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT


The equipment under test was installed in a representative system as described in section 7 of IEC 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system and extended at least 0.5 m.

6.7 Radio Frequency Electromagnetic Field (RS)

Modulation:	1kHz Sine Wave, 80%, AM Modulation
Frequency Step:	1 % of preceding frequency value
Dwell Time:	3 seconds

The test procedure was in accordance with EN/IEC 61000-4-3.

- The testing was performed in a modified semi-anechoic chamber.
- The frequency range shall be swept, with the signal 80% amplitude modulated with a 1kHz sine wave.
- The test was performed with the EUT exposed to both vertically and horizontally polarized fields on each of the four sides.

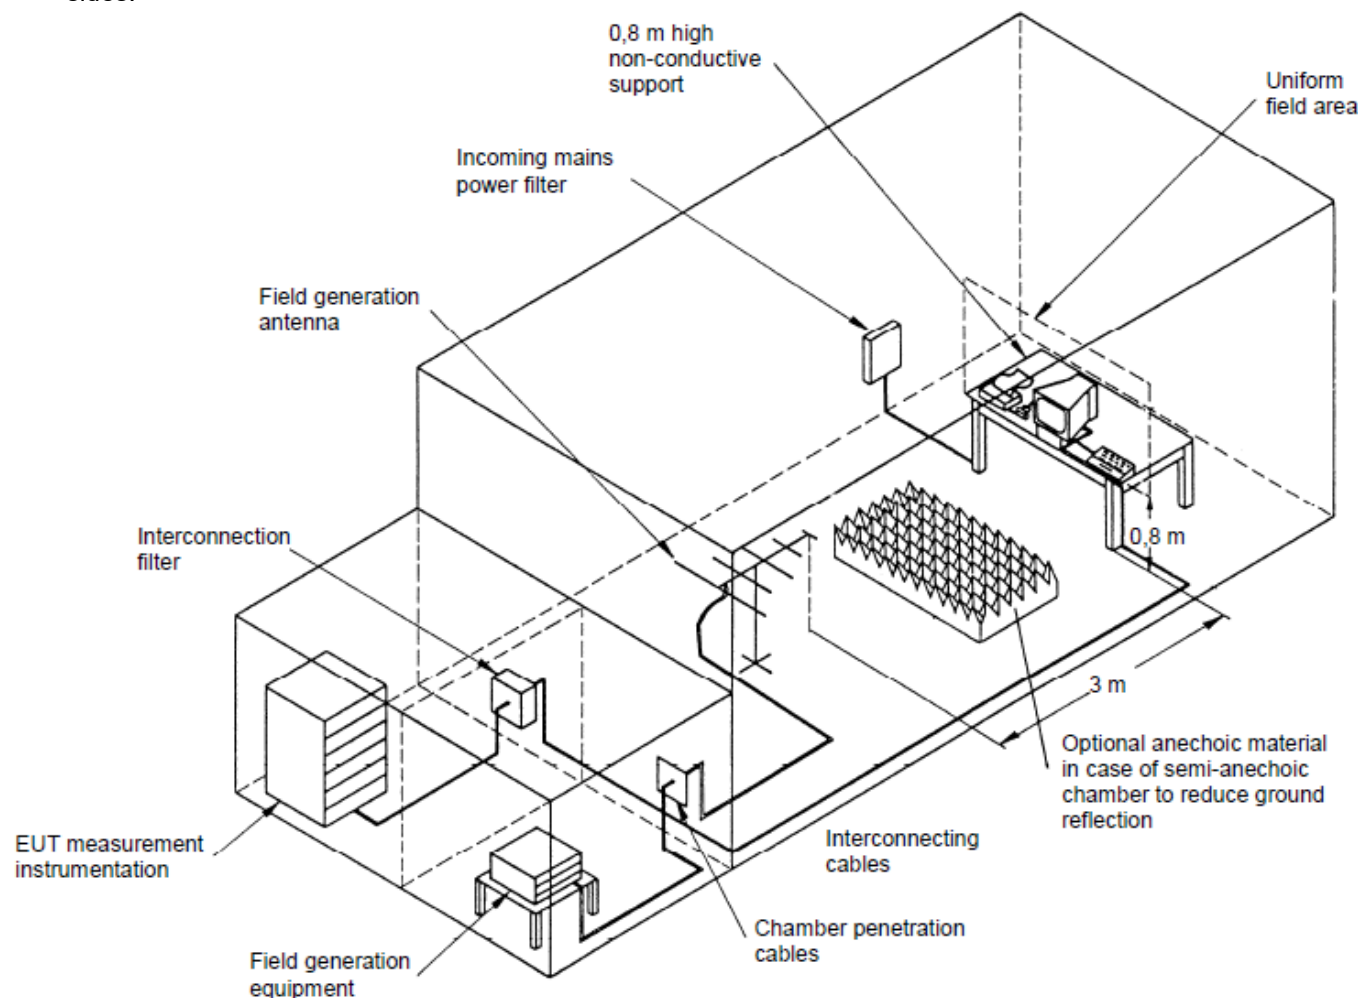

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

NOTE:

TABLETOP EQUIPMENT

The EUT installed in a representative system as described in section 7 of EN/IEC 61000-4-3 was placed on a non-conductive table 0.8 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.


FLOOR STANDING EQUIPMENT

The EUT installed in a representative system as described in section 7 of EN/IEC 61000-4-3 was placed on a non-conductive wood support 0.1 meters in height. The system under test was connected to the power and signal wire according to relevant installation instructions.

6.8 Fast Transients Common Mode (EFT)

Impulse Repetition Frequency:	5kHz
Impulse Wave Shape:	5/50 ns
Burst Duration:	15 ms
Burst Period:	300 ms
Test Duration:	1 min.

- Both positive and negative polarity discharges were applied.
- The distance between any coupling devices and the EUT should be 0.5 m for table-top equipment testing, and 1.0 m for floor standing equipment.
- The duration time of each test sequential was 1 minute.
- The transient/burst waveform was in accordance with EN/IEC 61000-4-4, 5/50 ns.

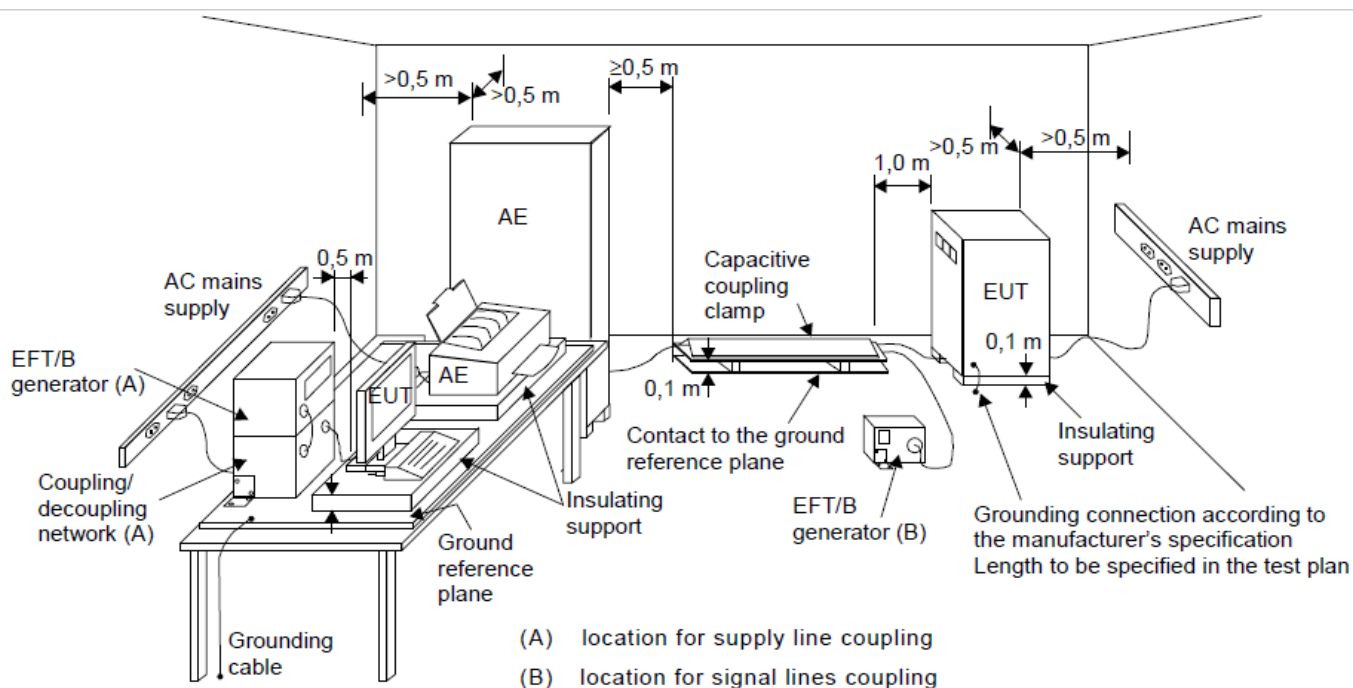

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.


6.9 Surges

Wave-Shape:	Battery referenced ports (except at the output of energy sources), auxiliary AC power input ports: 1.2/50 μ s Open Circuit Voltage 8/20 μ s Short Circuit Current
Pulse Repetition Rate:	60 sec.
Number of Tests:	5 positive and 5 negative at selected points

a. EUT Power ports:

The surge shall be applied to the EUT power supply terminals via the capacitive coupling network. Decoupling networks are required in order to avoid possible adverse effects on equipment not under test that may be powered by the same lines and to provide sufficient decoupling impedance to the surge wave. The power cord between the EUT and the coupling network shall not exceed 2 meters in length.

For double-insulated products without PE or external earth connections, the test shall be done in a similar way as for grounded products but without adding any additional external grounded connections. If there are no other possible connections to earth, line-to-ground tests may be omitted.

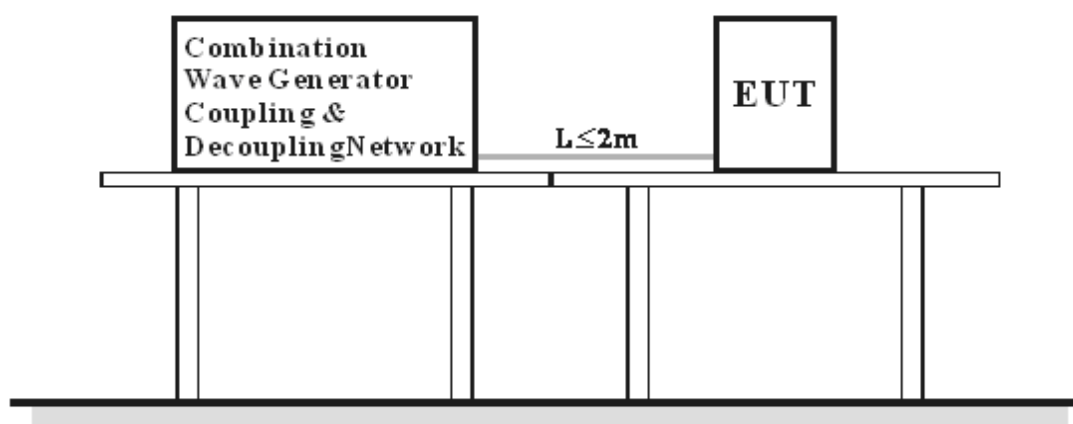

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

7 Test Results of Test Item

7.1 Conducted Emissions from Power Ports


Mode A

Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 9 kHz
Input Power	230 Vac, 50 Hz	Environmental Conditions	25 °C, 66% RH, 997.2 mbar
Tested by	Desmond Chen		

Phase Of Power : Line (L)						
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)
			Q.P.	Q.P.	Q.P.	Q.P.
1	0.16787	9.63	38.70	48.33	99.00	-50.67
2	0.20846	9.62	31.61	41.23	99.00	-57.77
3	0.48524	9.62	27.37	36.99	99.00	-62.01
4	1.28525	9.63	21.27	30.90	93.00	-62.10
5	3.23375	9.68	23.28	32.96	93.00	-60.04
6	7.52000	9.78	22.60	32.38	93.00	-60.62
7	11.06600	9.87	23.54	33.41	93.00	-59.59

Remarks:

1. Q.P. is abbreviations of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

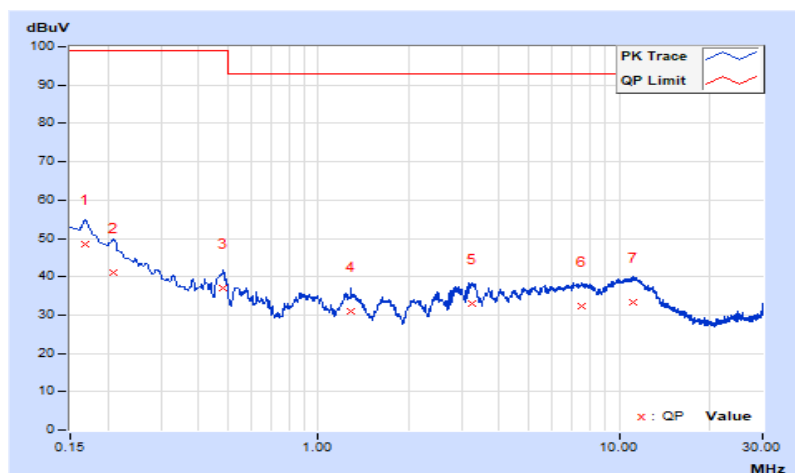


Frequency Range	150 kHz ~ 30 MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 9 kHz
Input Power	230 Vac, 50 Hz	Environmental Conditions	25 °C, 66% RH, 997.2 mbar
Tested by	Desmond Chen		

Phase Of Power : Line (L)						
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)	Emission Level (dBuV)	Limit (dBuV)	Margin (dB)
			Q.P.	Q.P.	Q.P.	Q.P.
1	0.17651	9.61	39.76	49.37	99.00	-49.63
2	0.44008	9.59	25.11	34.70	99.00	-64.30
3	0.75814	9.61	15.75	25.36	93.00	-67.64
4	3.33275	9.66	21.35	31.01	93.00	-61.99
5	7.65050	9.77	23.75	33.52	93.00	-59.48
6	11.15600	9.86	27.26	37.12	93.00	-55.88

Remarks:

1. Q.P. is abbreviations of quasi-peak individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

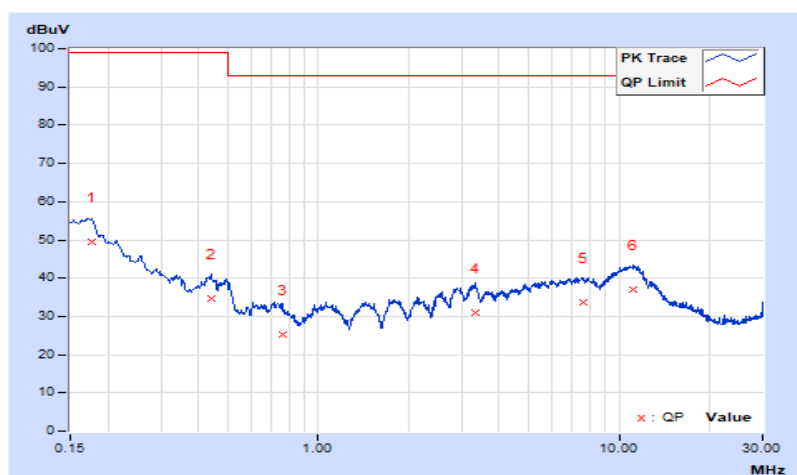

7.2 Radiated Emissions up to 1 GHz


Mode A

Frequency Range	30 MHz ~ 1 GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120 kHz
Input Power	230 Vac, 50 Hz	Environmental Conditions	33 °C, 50% RH, 1000 mbar
Tested By	Paul Chen		

Antenna Polarity & Test Distance : Horizontal at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	39.72	27.74 QP	40.00	-12.26	4.00 H	133	42.70	-14.96
2	124.98	26.88 QP	40.00	-13.12	4.00 H	283	35.99	-9.11
3	148.50	26.19 QP	40.00	-13.81	4.00 H	114	35.81	-9.62
4	217.59	25.90 QP	40.00	-14.10	4.00 H	131	36.62	-10.72
5	249.99	32.15 QP	47.00	-14.85	4.00 H	240	39.29	-7.14
6	297.00	31.89 QP	47.00	-15.11	3.60 H	115	37.99	-6.10
7	445.49	33.16 QP	47.00	-13.84	2.29 H	271	36.23	-3.07
8	594.07	34.92 QP	47.00	-12.08	1.84 H	332	34.36	0.56
9	891.06	34.33 QP	47.00	-12.67	1.00 H	68	29.38	4.95

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

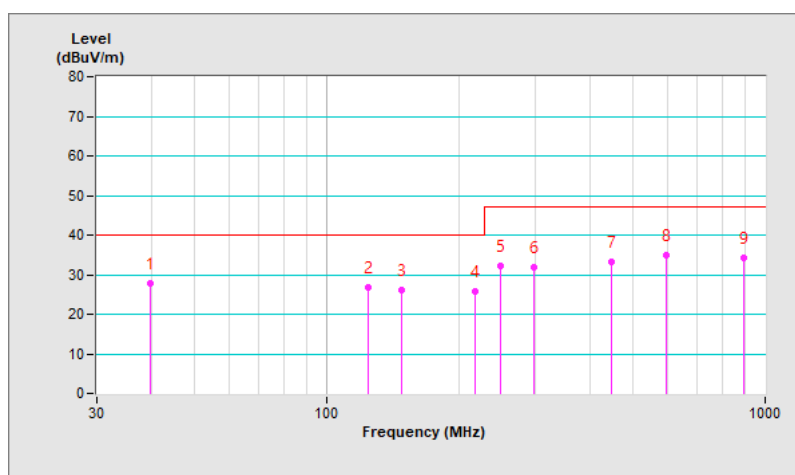


Frequency Range	30 MHz ~ 1 GHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP), 120 kHz
Input Power	230 Vac, 50 Hz	Environmental Conditions	33 °C, 50% RH, 1000 mbar
Tested By	Paul Chen		

Antenna Polarity & Test Distance : Vertical at 10 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	32.47	27.93 QP	40.00	-12.07	1.18 V	67	38.98	-11.05
2	79.59	26.77 QP	40.00	-13.23	1.86 V	119	40.76	-13.99
3	125.01	33.43 QP	40.00	-6.57	1.00 V	27	42.53	-9.10
4	148.50	34.00 QP	40.00	-6.00	1.00 V	194	43.62	-9.62
5	193.76	29.64 QP	40.00	-10.36	1.00 V	298	41.19	-11.55
6	250.00	31.16 QP	47.00	-15.84	1.00 V	155	38.30	-7.14
7	445.48	33.81 QP	47.00	-13.19	1.00 V	328	36.88	-3.07
8	593.98	32.55 QP	47.00	-14.45	3.17 V	164	31.99	0.56
9	890.94	35.07 QP	47.00	-11.93	2.04 V	323	30.12	4.95

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

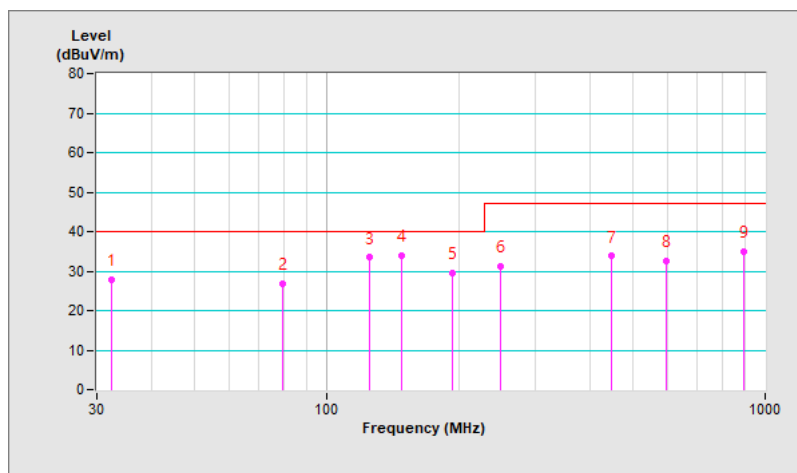

7.3 Radiated Emissions above 1 GHz


Mode A

Frequency Range	1 GHz ~ 6 GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1 MHz
Input Power	230 Vac, 50 Hz	Environmental Conditions	24 °C, 65% RH, 997.1 mbar
Tested By	Kenny Chang		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1199.72	50.38 PK	76.00	-25.62	1.07 H	308	54.39	-4.01
2	1199.72	36.31 AV	56.00	-19.69	1.07 H	308	40.32	-4.01
3	1313.33	44.23 PK	76.00	-31.77	2.17 H	3	48.05	-3.82
4	1313.33	30.19 AV	56.00	-25.81	2.17 H	3	34.01	-3.82
5	2487.54	46.32 PK	76.00	-29.68	1.09 H	226	46.14	0.18
6	2487.54	33.08 AV	56.00	-22.92	1.09 H	226	32.90	0.18
7	3955.91	49.71 PK	80.00	-30.29	2.20 H	358	44.06	5.65
8	3955.91	36.30 AV	60.00	-23.70	2.20 H	358	30.65	5.65
9	4615.39	49.72 PK	80.00	-30.28	3.03 H	207	43.90	5.82
10	4615.39	36.20 AV	60.00	-23.80	3.03 H	207	30.38	5.82
11	5708.04	52.56 PK	80.00	-27.44	2.84 H	264	44.35	8.21
12	5708.04	38.37 AV	60.00	-21.63	2.84 H	264	30.16	8.21

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
3. Margin value = Emission level – Limit value
4. The other emission levels were very low against the limit.

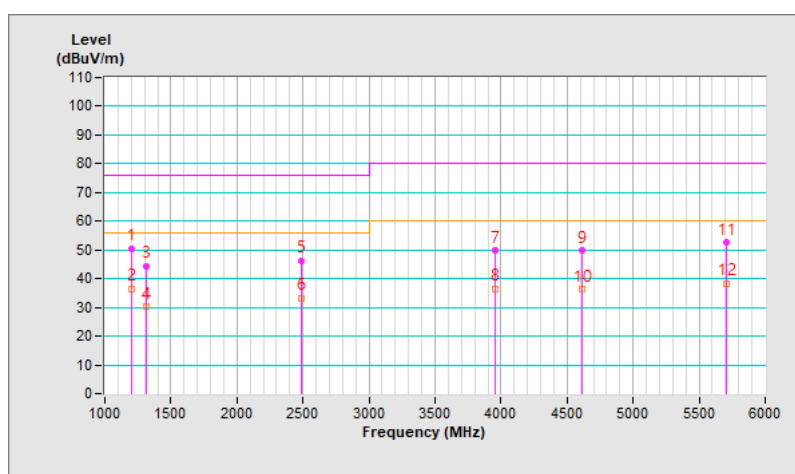


Frequency Range	1 GHz ~ 6 GHz	Detector Function & Resolution Bandwidth	Peak (PK) / Average (AV), 1 MHz
Input Power	230 Vac, 50 Hz	Environmental Conditions	24 °C, 65% RH, 997.1 mbar
Tested By	Kenny Chang		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1199.04	52.27 PK	76.00	-23.73	2.01 V	206	56.29	-4.02
2	1199.04	31.70 AV	56.00	-24.30	2.01 V	206	35.72	-4.02
3	1433.76	46.77 PK	76.00	-29.23	1.18 V	25	50.53	-3.76
4	1433.76	32.37 AV	56.00	-23.63	1.18 V	25	36.13	-3.76
5	2000.01	49.95 PK	76.00	-26.05	1.09 V	228	51.25	-1.30
6	2000.01	33.22 AV	56.00	-22.78	1.09 V	228	34.52	-1.30
7	3380.17	48.76 PK	80.00	-31.24	1.32 V	57	45.36	3.40
8	3380.17	34.78 AV	60.00	-25.22	1.32 V	57	31.38	3.40
9	4846.00	50.04 PK	80.00	-29.96	2.88 V	234	43.61	6.43
10	4846.00	36.57 AV	60.00	-23.43	2.88 V	234	30.14	6.43
11	5519.00	51.56 PK	80.00	-28.44	2.10 V	209	43.59	7.97
12	5519.00	37.77 AV	60.00	-22.23	2.10 V	209	29.80	7.97

Remarks:

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
– Pre-Amplifier Factor (dB)
- Margin value = Emission level – Limit value
- The other emission levels were very low against the limit.

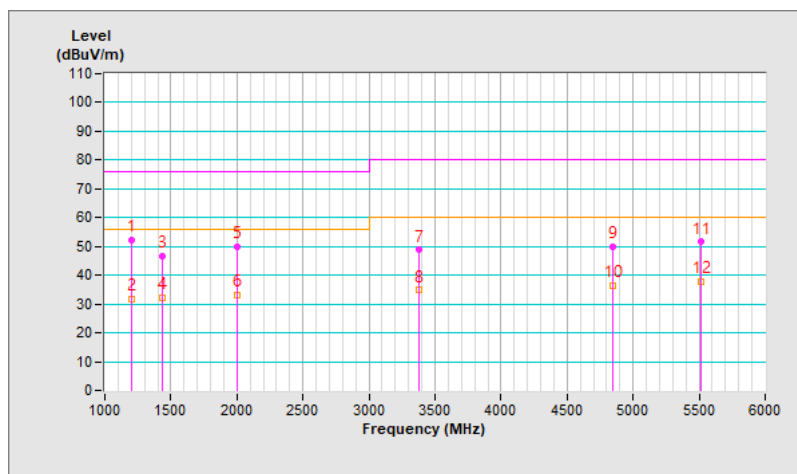

7.4 Harmonic Current Measurement

Mode A

Test Duration	5 min	Fundamental Voltage / Ampere	230.507 Vrms / 0.195 Arms
Power Consumption	14.1 W	Power Frequency	50 Hz
Power Factor	0.327	Environmental Conditions	23 °C, 53% RH
Tested By	Ion Cheng		

Notes:

1. Limits are not specified for equipment with a rated power of 75W or less (other than lighting equipment).
2. According to EN 61000-3-2 the manufacturer shall specify the power of the apparatus. This value shall be used for establishing limits. The specified power shall be within +/-10% of the measured power.

7.5 Voltage Fluctuations and Flicker Measurement

Mode A

Observation (Tp)	10 min		
Input Power	230 Vac, 50 Hz	Environmental Conditions	23 °C, 53% RH
Tested By	Ion Cheng		

Test Parameter	Measurement Value	Limit	Remarks
P_{st}	0.169	1.00	Pass
P_{lt}	0.074	0.65	Pass
T_{max} (ms)	0.000	500	Pass
d_{max} (%)	0.030	4.00	Pass
d_c (%)	0.000	3.30	Pass

Notes:

1. P_{st} means short-term flicker indicator.
2. P_{lt} means long-term flicker indicator.
3. T_{max} means accumulated time value of $d(t)$ with a deviation exceeding 3.3 %.
4. d_{max} means maximum relative voltage change.
5. d_c means maximum relative steady-state voltage change.

7.6 Electrostatic Discharges (ESD)

Mode A

For EN 50121-3-2

Input Power	AC 230V / 50Hz	Environmental conditions	23 °C, 39 % RH 992 mbar
Tested by	Willy Wong		

Test Results of Direct Application					
Discharge Level (kV)	Polarity (+/-)	Test Point	Contact Discharge	Air Discharge	Performance Criteria
2, 4, 6	+/-	1, 2, 6 - 9	Note	---	A
2, 4, 8	+/-	3, 4, 5, 10, 11, 12	---	Note	A

Description of test points of direct application: Please refer to following page for representative mark only.

Test Results of Indirect Application					
Discharge Level (kV)	Polarity (+/-)	Test Point	Horizontal Coupling Plane	Vertical Coupling Plane	Performance Criteria
2, 4, 6	+/-	Four sides	Note	Note	A



Description of test points of indirect application:


1. Front side 2. Rear side 3. Right side 4. Left side



Please refer to the attached page for description of test points.



Note: The EUT is operated normal during the test.


Description of test point

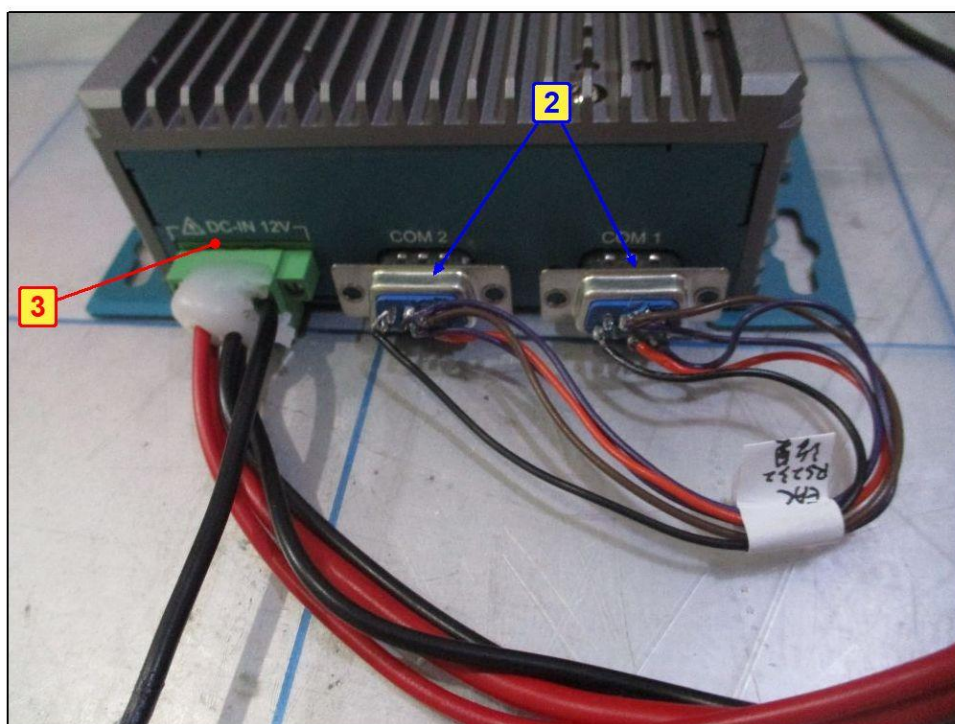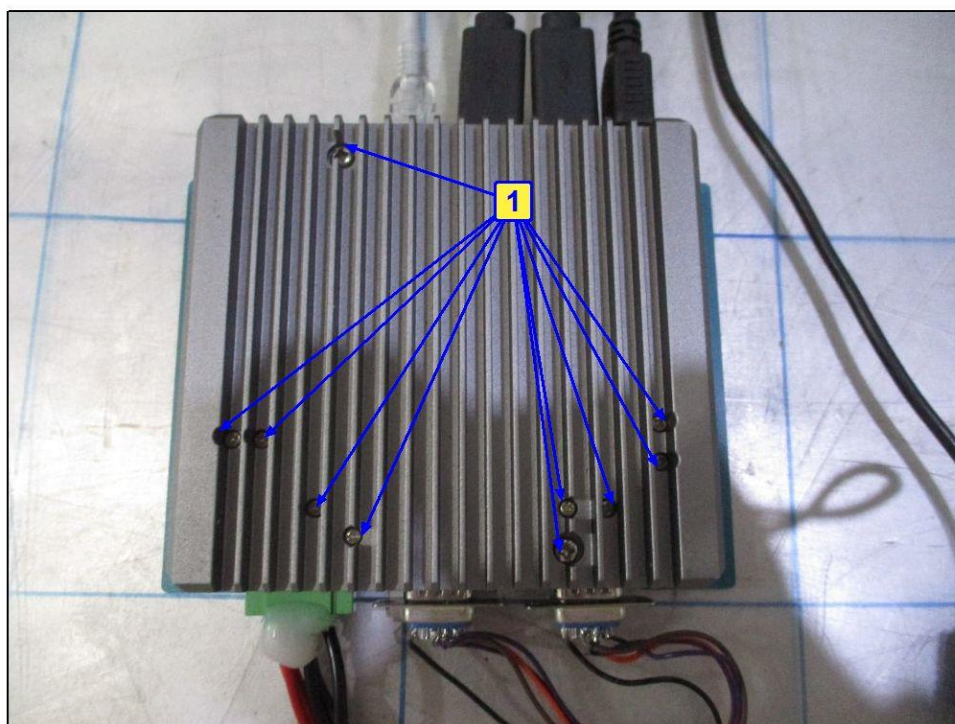

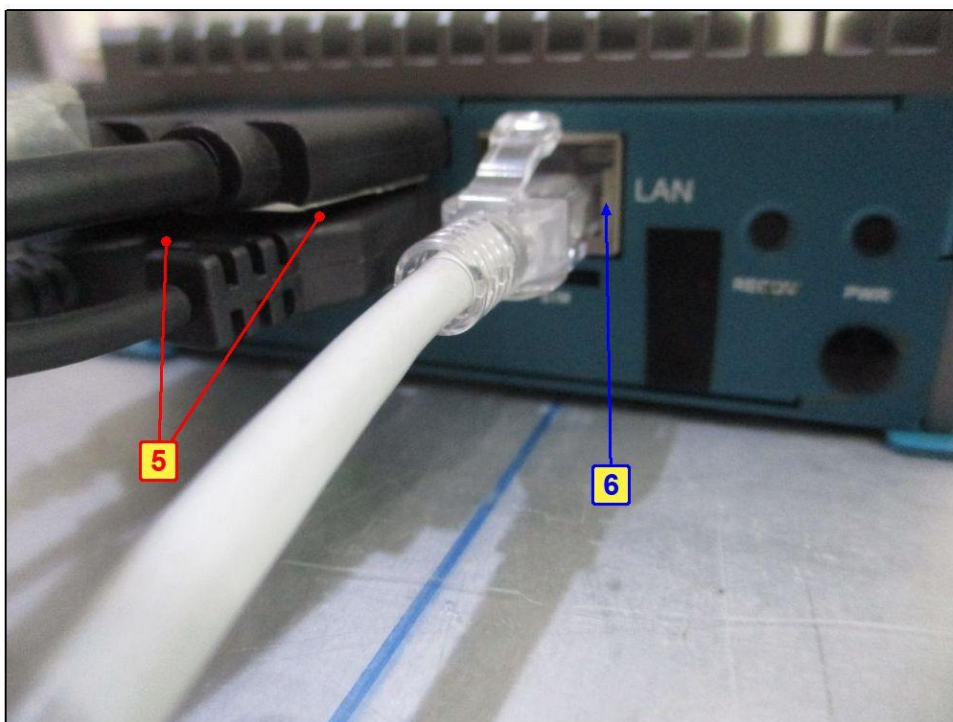

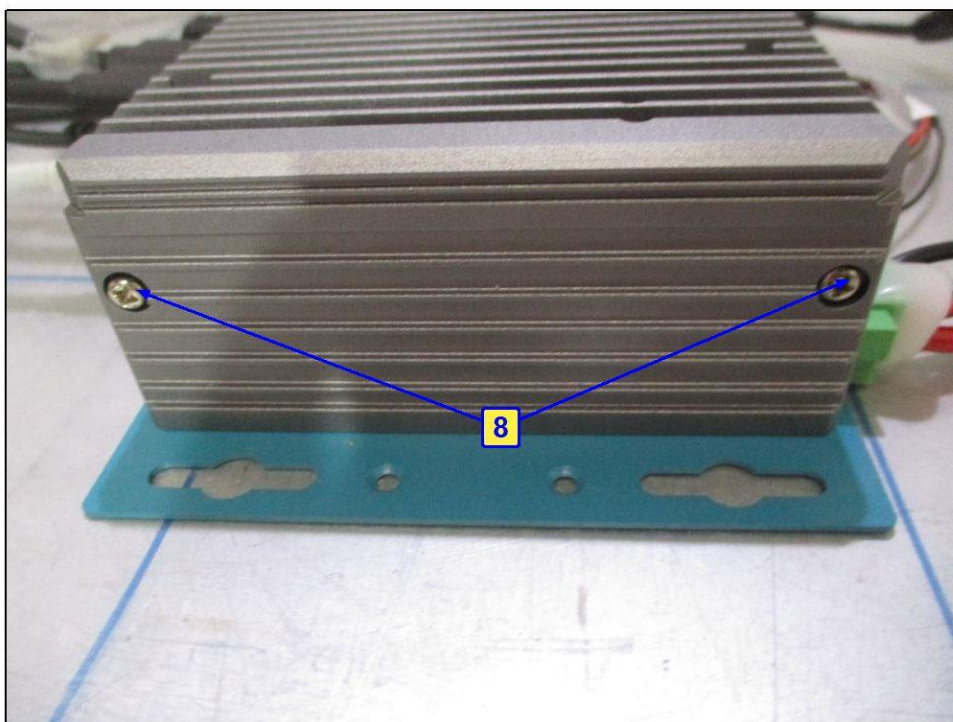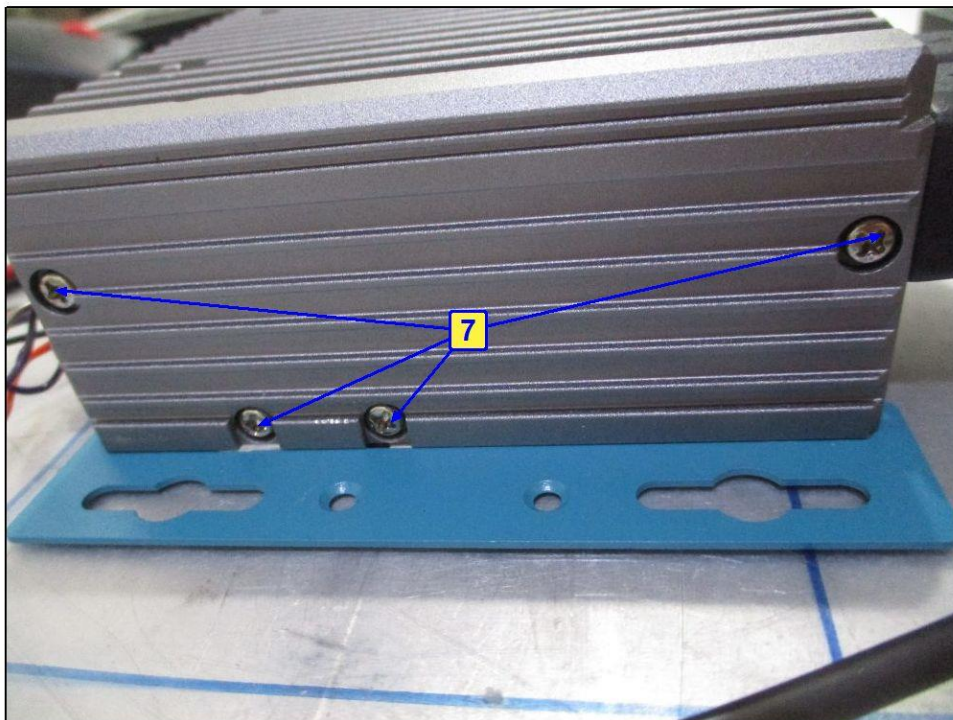

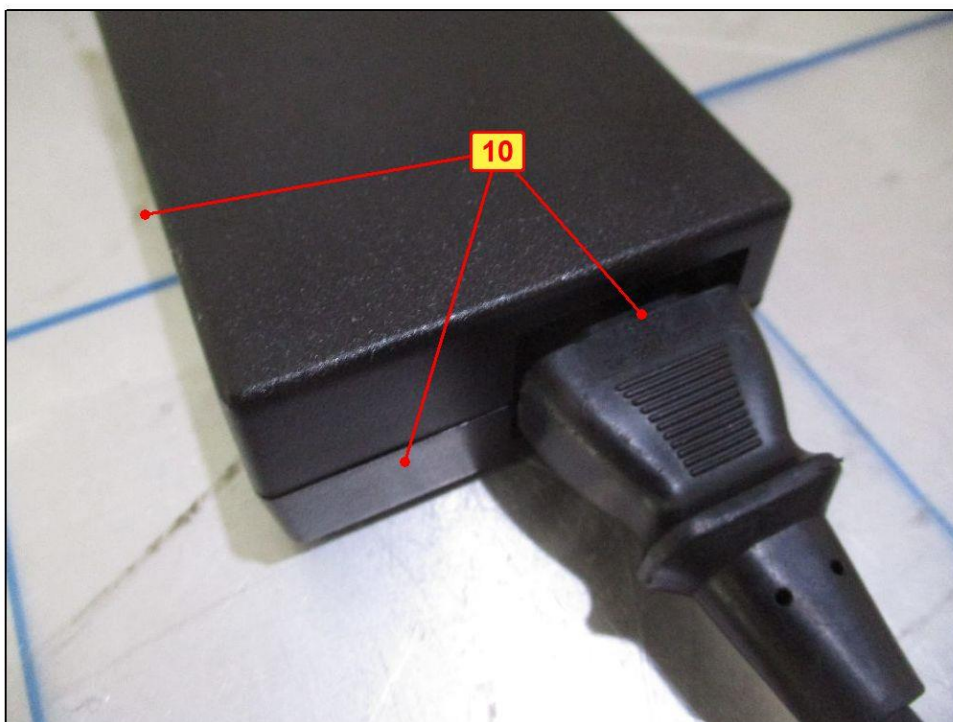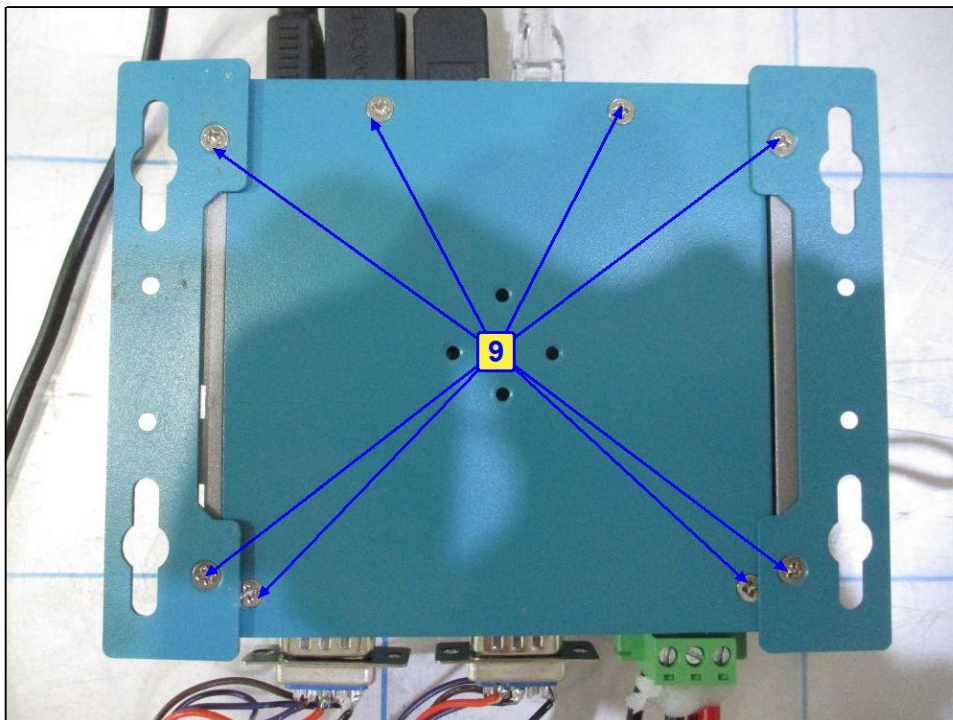

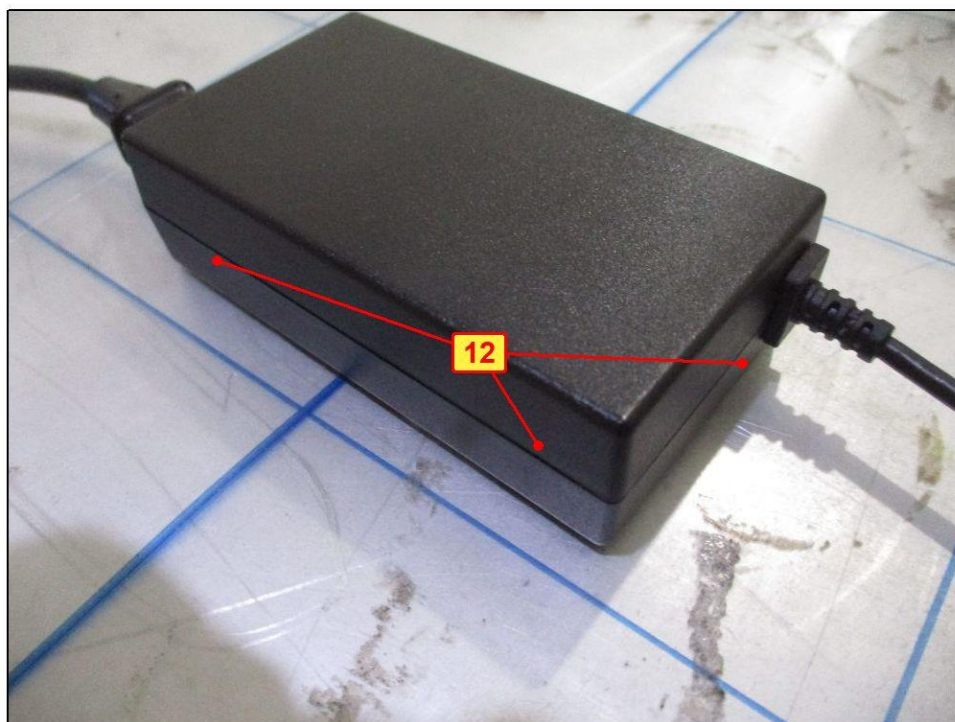

7.7 Radio Frequency Electromagnetic Field (RS)

Mode A

For EN 50121-3-2

Input Power	AC 230V / 50Hz	Environmental conditions	26 °C, 62 % RH 996 mbar
Tested by	Todd Chang		

Frequency (MHz)	Polarity	Azimuth(°)	Applied Field Strength		Observation	Performance Criteria
			(V/m)	Modulation		
80 - 800	V&H	0, 90, 180, 270	20	80% AM (1kHz)	Note	A
800 - 1000	V&H	0, 90, 180, 270	20	80% AM (1kHz)	Note	A
1400 - 2000	V&H	0, 90, 180, 270	10	80% AM (1kHz)	Note	A
2000 - 2700	V&H	0, 90, 180, 270	5	80% AM (1kHz)	Note	A
5100 - 6000	V&H	0, 90, 180, 270	3	80% AM (1kHz)	Note	A

Note: The EUT is operated normal during the test.

7.8 Fast Transients Common Mode (EFT)

Mode A

For EN 50121-3-2

Input Power	AC 230V / 50Hz	Environmental conditions	25 °C, 71 % RH 1002 mbar
Tested by	Bernie Lu		

Input AC power port				
Voltage (kV)	Test Point	Polarity (+/-)	Observation	Performance Criteria
2	L	+/-	Note	A
2	N	+/-	Note	A
2	PE	+/-	Note	A
2	L-N-PE	+/-	Note	A

Wired network and signal/ control port				
Voltage (kV)	Test Point	Polarity (+/-)	Observation	Performance Criteria
2	LAN	+/-	Note	A

Note: The EUT is operated normal during the test.

7.9 Surges

Mode A

For EN 50121-3-2

Input Power	AC 230V / 50Hz	Environmental conditions	27 °C, 61 % RH 998 mbar
Tested by	Michael Cheng		

Input AC power port					
Voltage (kV)	Test Point	Azimuth(°)	Polarity (+/-)	Observation	Performance Criteria
0.5, 1(42 Ω+0.5μF)	L-N	0, 90, 180, 270	+/-	Note	A
0.5, 1, 2(42 Ω+0.5μF)	L-PE	0, 90, 180, 270	+/-	Note	A
0.5, 1, 2(42 Ω+0.5μF)	N-PE	0, 90, 180, 270	+/-	Note	A

Note: The EUT is operated normal during the test.

7.10 Radio Frequency Common Mode (CS)

Mode A

For EN 50121-3-2

Input Power	AC 230V / 50Hz	Environmental conditions	26 °C, 69 % RH 990 mbar
Tested by	Eric Liao		

Input AC power port							
Frequency (MHz)	Level (V rms)	Modulation	Tested Line	Injection Method	Return Path	Observation	Performance Criteria
0.15 - 80	10	80% AM (1kHz)	AC	CDN-M3	CDN-M1	Note	A


Wired network and signal/ control port							
Frequency (MHz)	Level (V rms)	Modulation	Tested Line	Injection Method	Return Path	Observation	Performance Criteria
0.15 - 80	10	80% AM (1kHz)	LAN	CDN ST08A	CDN-M1	Note	A

Note: The EUT is operated normal during the test.

8 Pictures of Test Arrangements

8.1 Conducted Emissions from Power Ports

Mode A

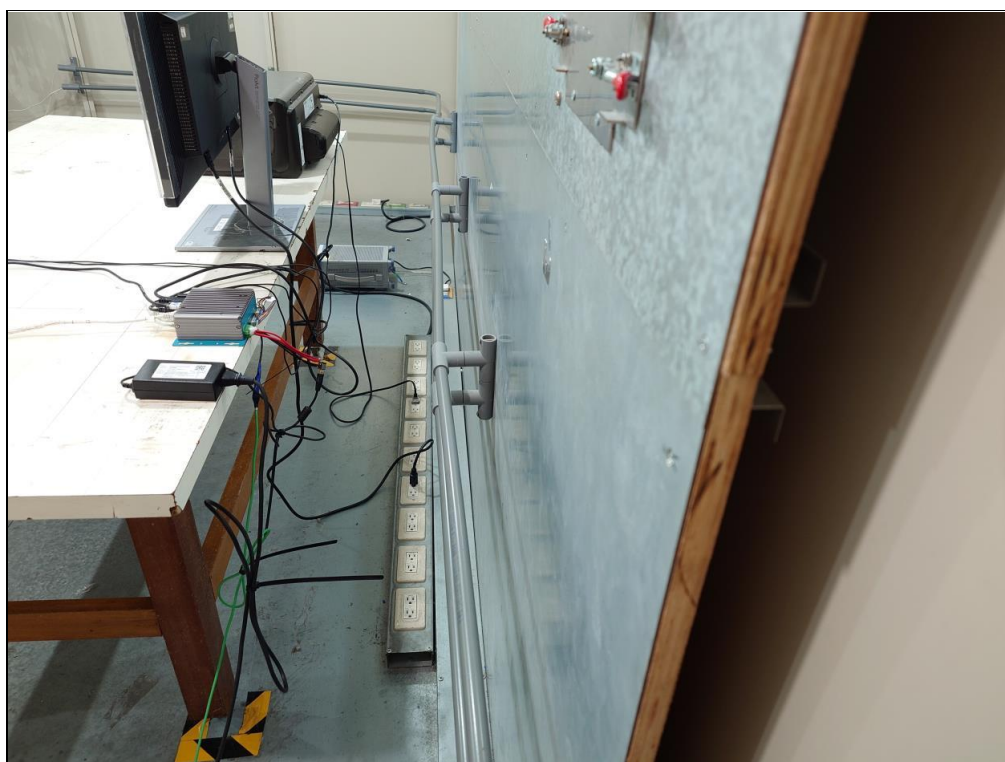

8.2 Radiated Emissions up to 1 GHz

Mode A



8.3 Radiated Emissions above 1 GHz

Mode A



8.4 Harmonic Current Measurement

Mode A




8.5 Voltage Fluctuations and Flicker Measurement

Mode A



8.6 Electrostatic Discharges (ESD)

Mode A

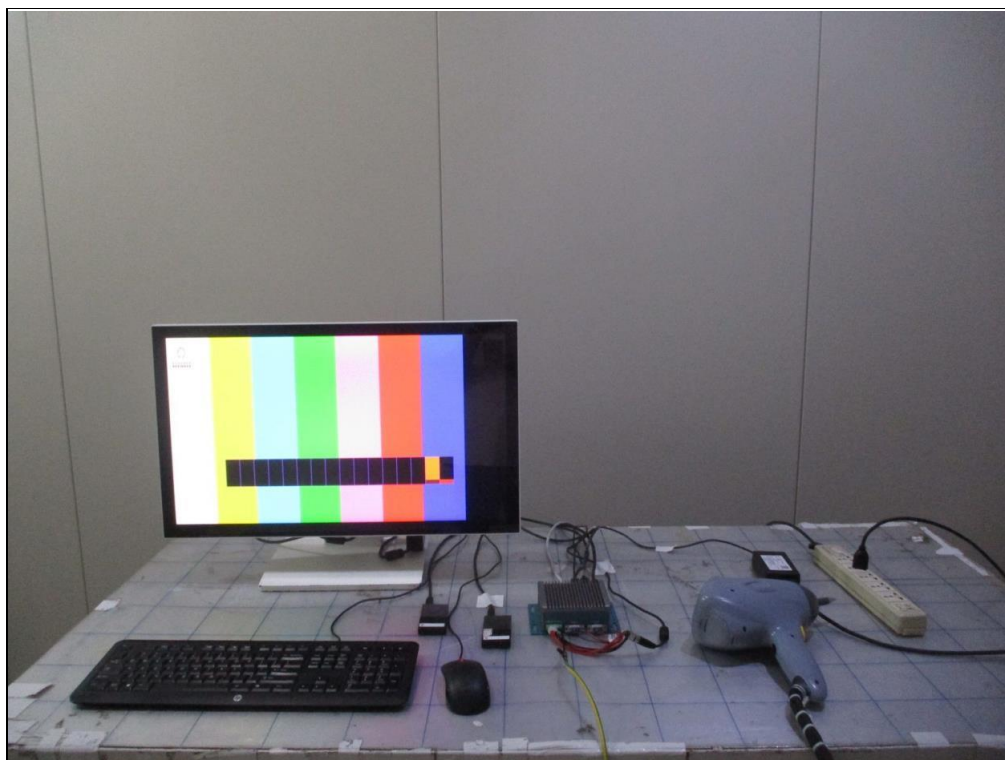

8.7 Radio Frequency Electromagnetic Field (RS)


Mode A




8.8 Fast Transients Common Mode (EFT)

Mode A

AC

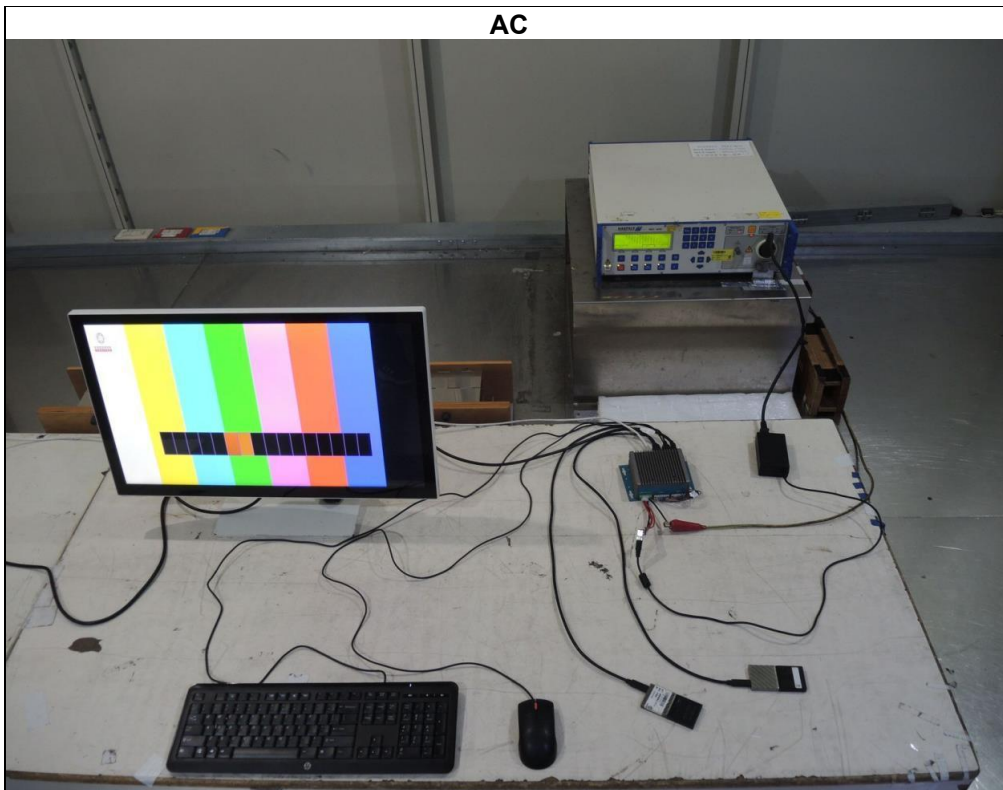

LAN

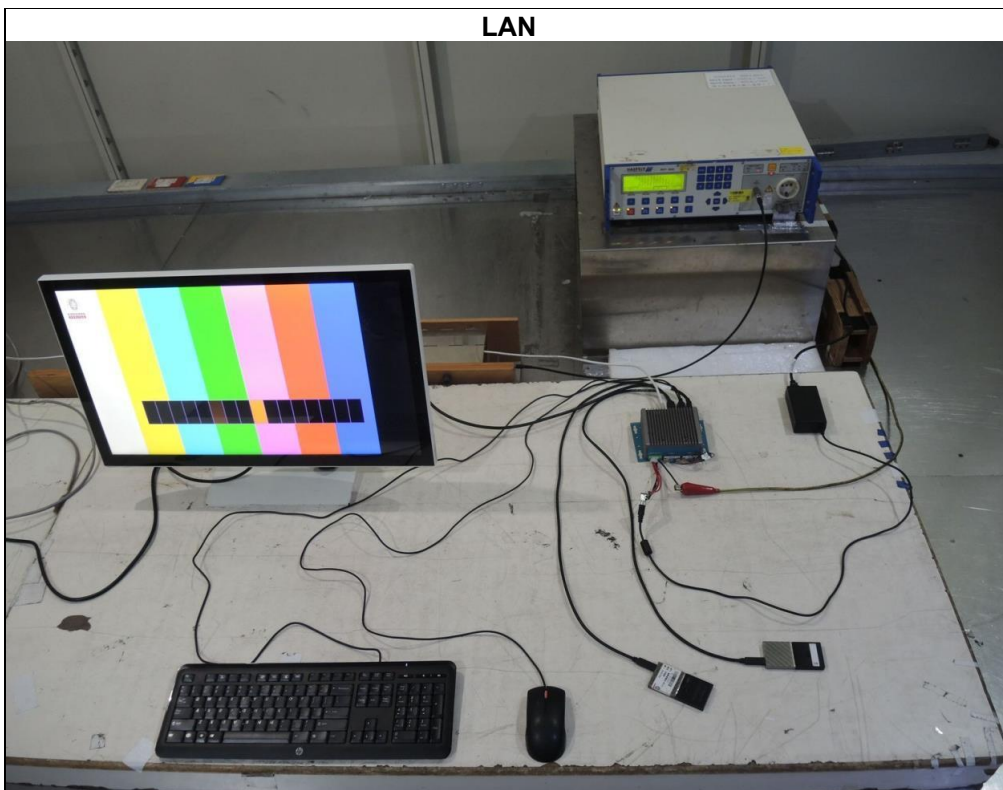

8.9 Surges


Mode A




8.10 Radio Frequency Common Mode (CS)

Mode A

AC

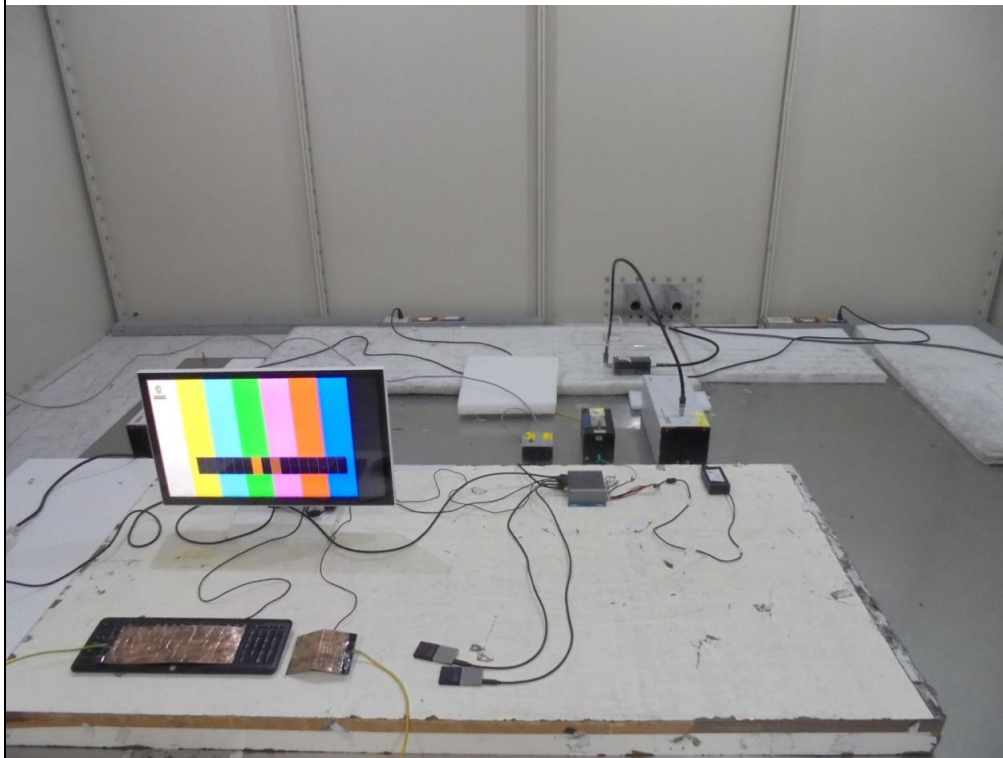

LAN

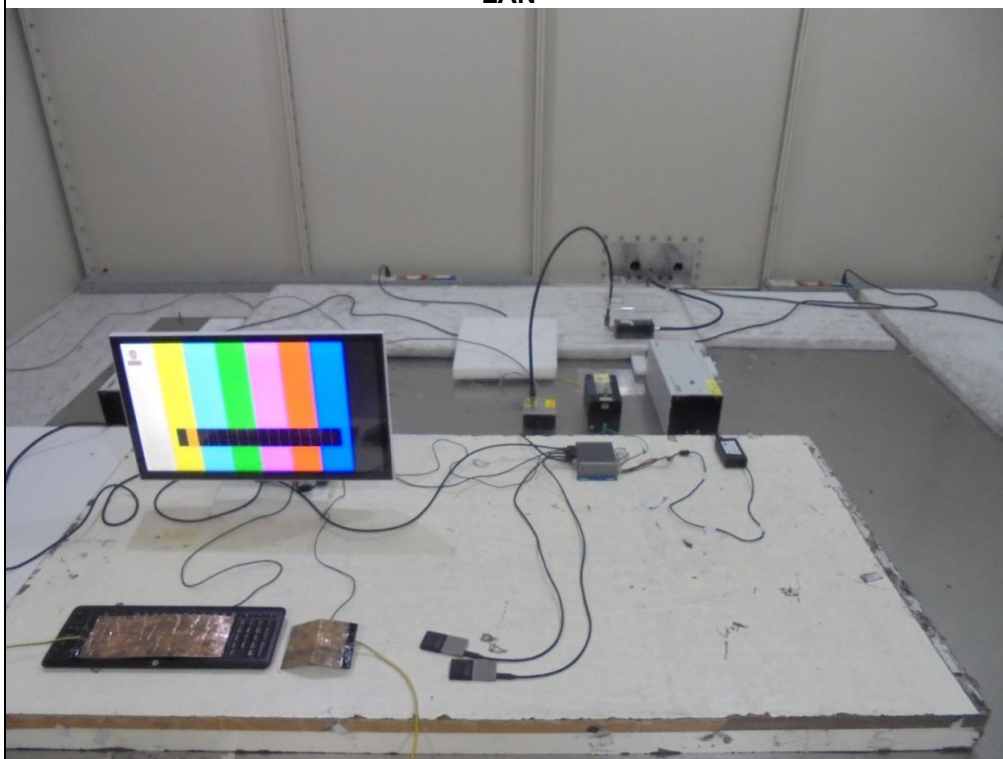

9 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@bureauveritas.com

Web Site: <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---